



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 21.0

PowerEdge R710 (Intel Xeon E5504, 2.00 GHz)

SPECint_base2006 = 19.0

CPU2006 license: 55


Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

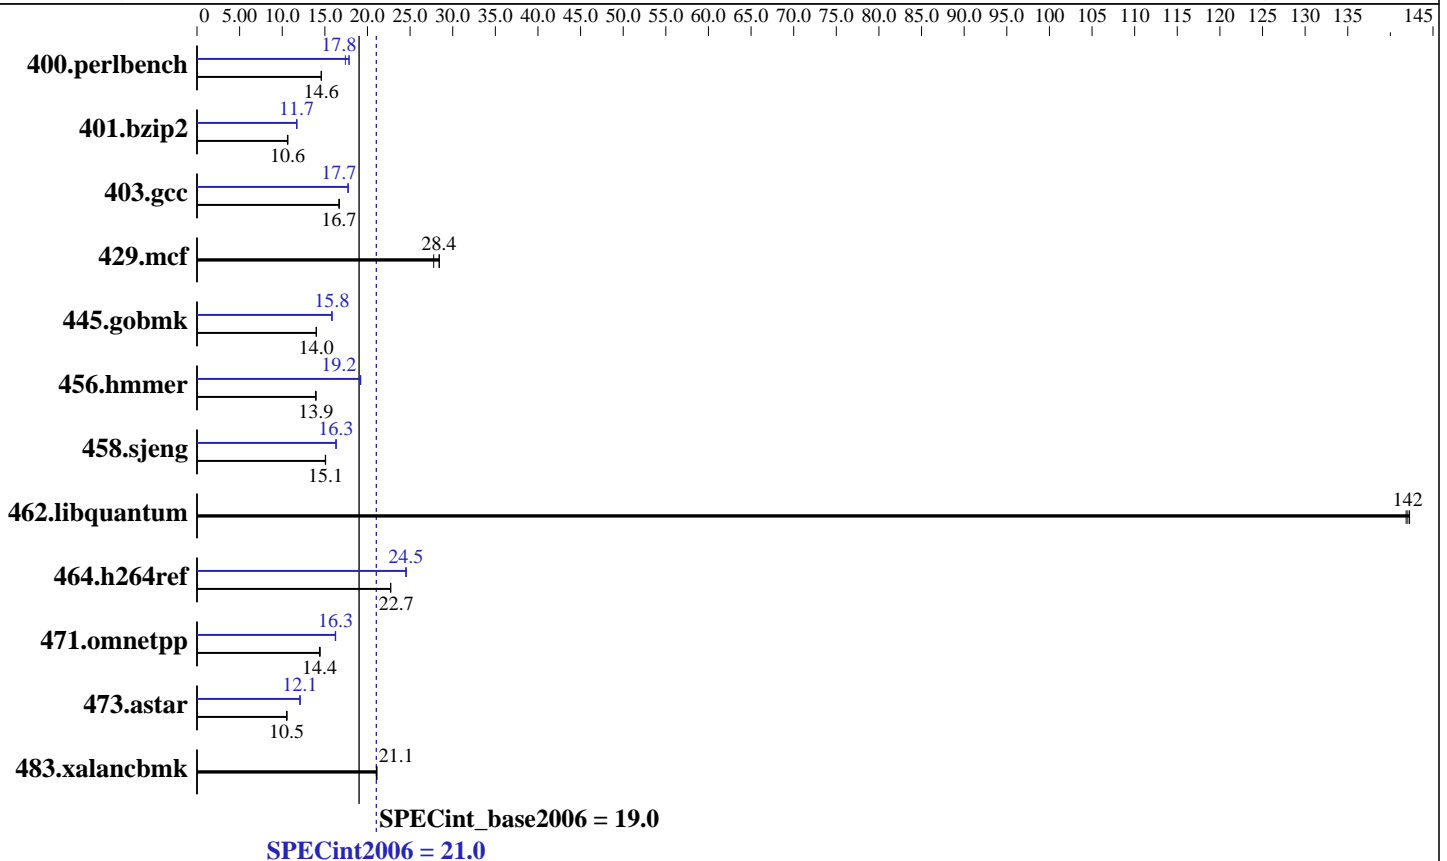

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 800 MHz)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.0

PowerEdge R710 (Intel Xeon E5504, 2.00 GHz)

SPECint_base2006 = 19.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	670	14.6	669	14.6	671	14.6	561	17.4	548	17.8	548	17.8
401.bzip2	905	10.7	910	10.6	908	10.6	823	11.7	827	11.7	825	11.7
403.gcc	482	16.7	483	16.7	483	16.7	454	17.7	454	17.7	454	17.7
429.mcf	328	27.8	321	28.4	321	28.4	328	27.8	321	28.4	321	28.4
445.gobmk	749	14.0	750	14.0	750	14.0	663	15.8	663	15.8	663	15.8
456.hammer	669	13.9	669	14.0	669	13.9	486	19.2	486	19.2	486	19.2
458.sjeng	804	15.1	802	15.1	802	15.1	741	16.3	742	16.3	742	16.3
462.libquantum	146	142	146	142	146	142	146	142	146	142	146	142
464.h264ref	973	22.7	975	22.7	975	22.7	902	24.5	902	24.5	903	24.5
471.omnetpp	434	14.4	433	14.4	435	14.4	384	16.3	385	16.3	385	16.2
473.astar	665	10.6	668	10.5	666	10.5	580	12.1	581	12.1	581	12.1
483.xalancbmk	327	21.1	327	21.1	328	21.0	327	21.1	327	21.1	328	21.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.0

PowerEdge R710 (Intel Xeon E5504, 2.00 GHz)

SPECint_base2006 = 19.0

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.0

PowerEdge R710 (Intel Xeon E5504, 2.00 GHz)

SPECint_base2006 = 19.0

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 21.0

PowerEdge R710 (Intel Xeon E5504, 2.00 GHz)

SPECint_base2006 = 19.0

CPU2006 license: 55

Test date: Jun-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:36:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 July 2009.