



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


SPECint[®]_rate2006 = 251

IBM System x3650 M3 (Intel Xeon X5550)

SPECint_rate_base2006 = 236

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

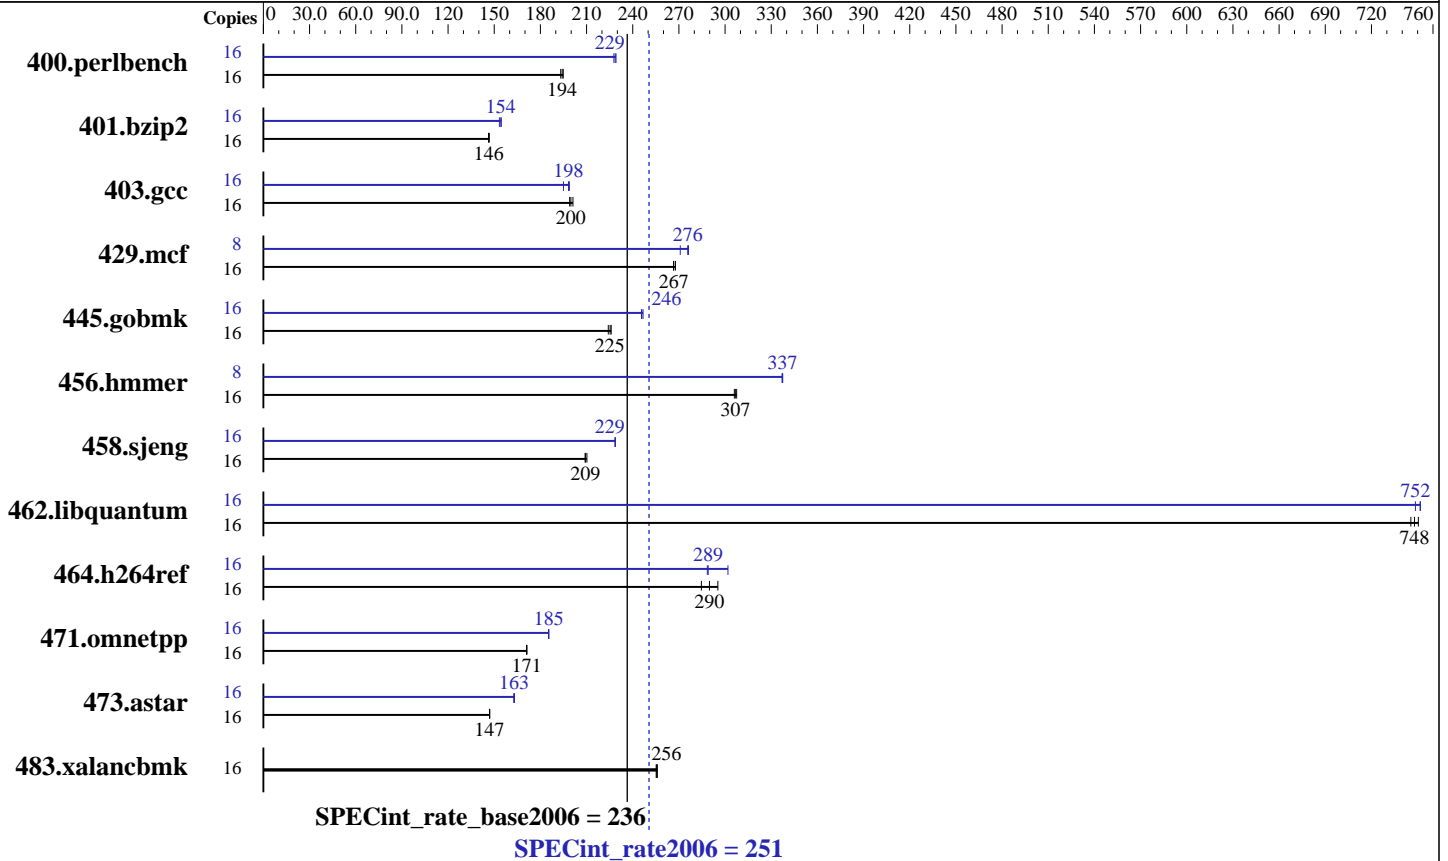

Hardware

CPU Name: Intel Xeon X5550
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R CL9, 2 Rank)
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 251

IBM System x3650 M3 (Intel Xeon X5550)

SPECint_rate_base2006 = 236

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	802	195	809	193	805	194	16	682	229	686	228	684	229
401.bzip2	16	1055	146	1052	147	1055	146	16	1007	153	1001	154	999	155
403.gcc	16	640	201	645	200	647	199	16	648	199	650	198	661	195
429.mcf	16	547	267	547	267	545	268	8	269	271	264	276	265	276
445.gobmk	16	745	225	749	224	743	226	16	683	246	683	246	680	247
456.hammer	16	485	308	488	306	487	307	8	221	337	221	337	221	337
458.sjeng	16	921	210	926	209	925	209	16	847	229	847	229	846	229
462.libquantum	16	445	746	442	750	443	748	16	443	749	441	752	441	752
464.h264ref	16	1199	295	1244	285	1222	290	16	1173	302	1225	289	1227	288
471.omnetpp	16	584	171	584	171	585	171	16	539	185	539	185	540	185
473.astar	16	764	147	764	147	764	147	16	688	163	690	163	690	163
483.xalancbmk	16	432	256	433	255	431	256	16	432	256	433	255	431	256

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Platform Notes

Turbo Mode Enable
Turbo Boost set to Traditional
CPU C State Enable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 251

IBM System x3650 M3 (Intel Xeon X5550)

SPECint_rate_base2006 = 236

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 251

IBM System x3650 M3 (Intel Xeon X5550)

SPECint_rate_base2006 = 236

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 251

IBM System x3650 M3 (Intel Xeon X5550)

SPECint_rate_base2006 = 236

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

473.astar (continued):

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 10:51:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 August 2010.