



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 59.2

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = 54.9

CPU2006 license: 20


Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

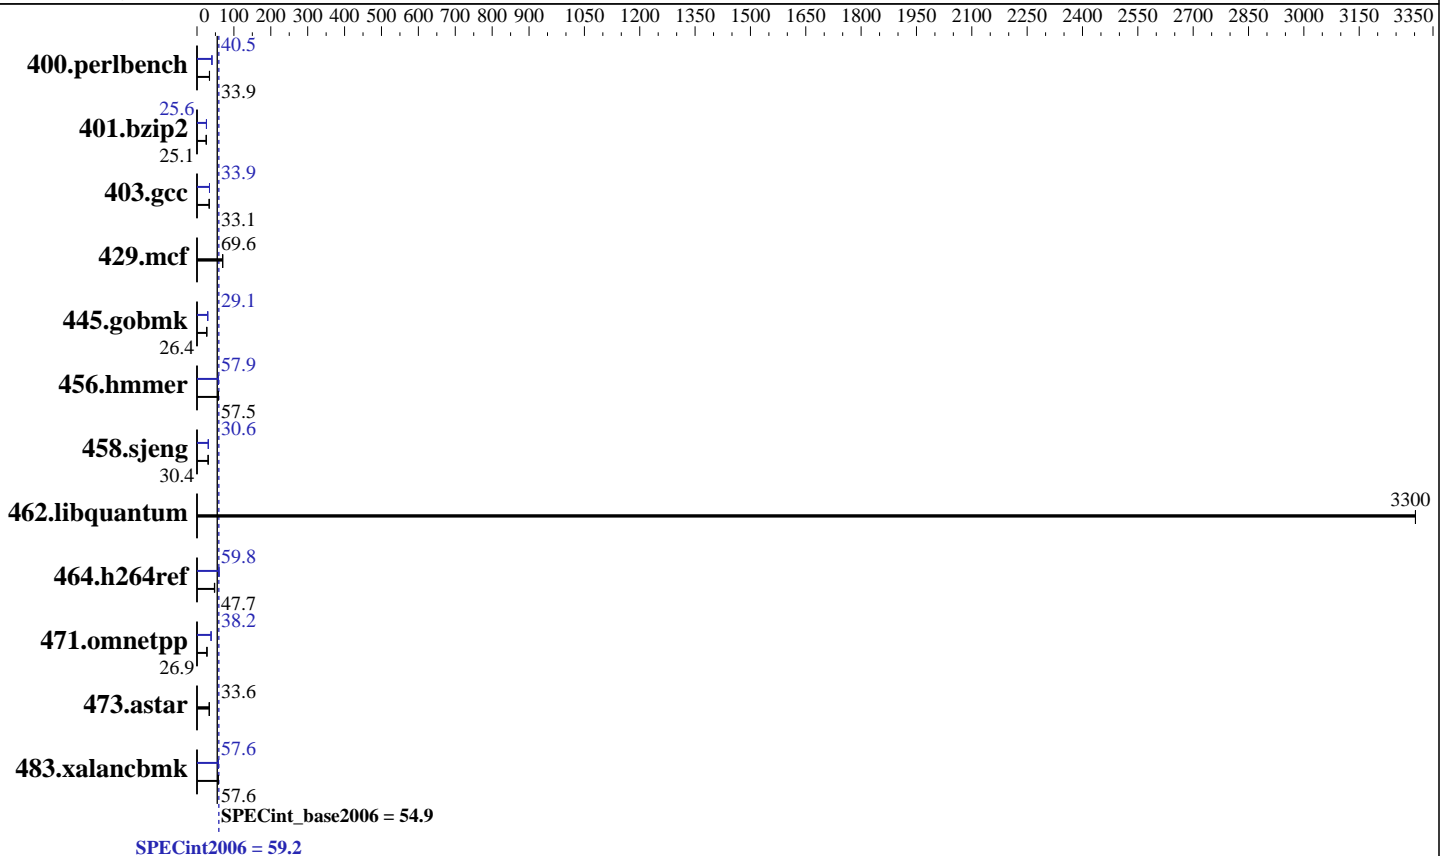

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 1 TB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **59.2**

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = **54.9**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	287	34.0	288	33.9	291	33.6	242	40.4	241	40.5	241	40.5
401.bzip2	384	25.1	385	25.1	385	25.1	377	25.6	377	25.6	376	25.6
403.gcc	243	33.2	244	33.0	243	33.1	238	33.8	238	33.9	238	33.9
429.mcf	131	69.6	131	69.6	131	69.5	131	69.6	131	69.6	131	69.5
445.gobmk	397	26.4	397	26.4	396	26.5	361	29.1	361	29.1	361	29.0
456.hammer	162	57.5	162	57.5	162	57.5	161	57.9	161	57.9	161	57.9
458.sjeng	399	30.4	404	30.0	397	30.5	395	30.6	395	30.6	395	30.6
462.libquantum	6.27	3300	6.27	3300	6.27	3300	6.27	3300	6.27	3300	6.27	3300
464.h264ref	463	47.8	464	47.7	470	47.1	370	59.8	370	59.9	378	58.6
471.omnetpp	231	27.1	233	26.9	233	26.8	164	38.2	164	38.2	164	38.1
473.astar	215	32.7	209	33.6	209	33.7	215	32.7	209	33.6	209	33.7
483.xalancbmk	120	57.6	120	57.6	121	57.1	120	57.7	120	57.6	120	57.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Performance in BIOS
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-Sandy Thu Feb 2 19:22:16 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 59.2

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = 54.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Platform Notes (Continued)

MemTotal: 132122692 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-Sandy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 2 19:20 last=5
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  197G  7.4G  180G   4% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

The Dell PowerEdge T620 nd

the Bull NovaScale T840 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge T620 model.

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 59.2

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = 54.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 59.2

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = 54.9

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 59.2

NovaScale T840 F3 (Intel Xeon E5-2690, 2.90 GHz)

SPECint_base2006 = 54.9

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:54:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 March 2012.