



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 33.8

## Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jan-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

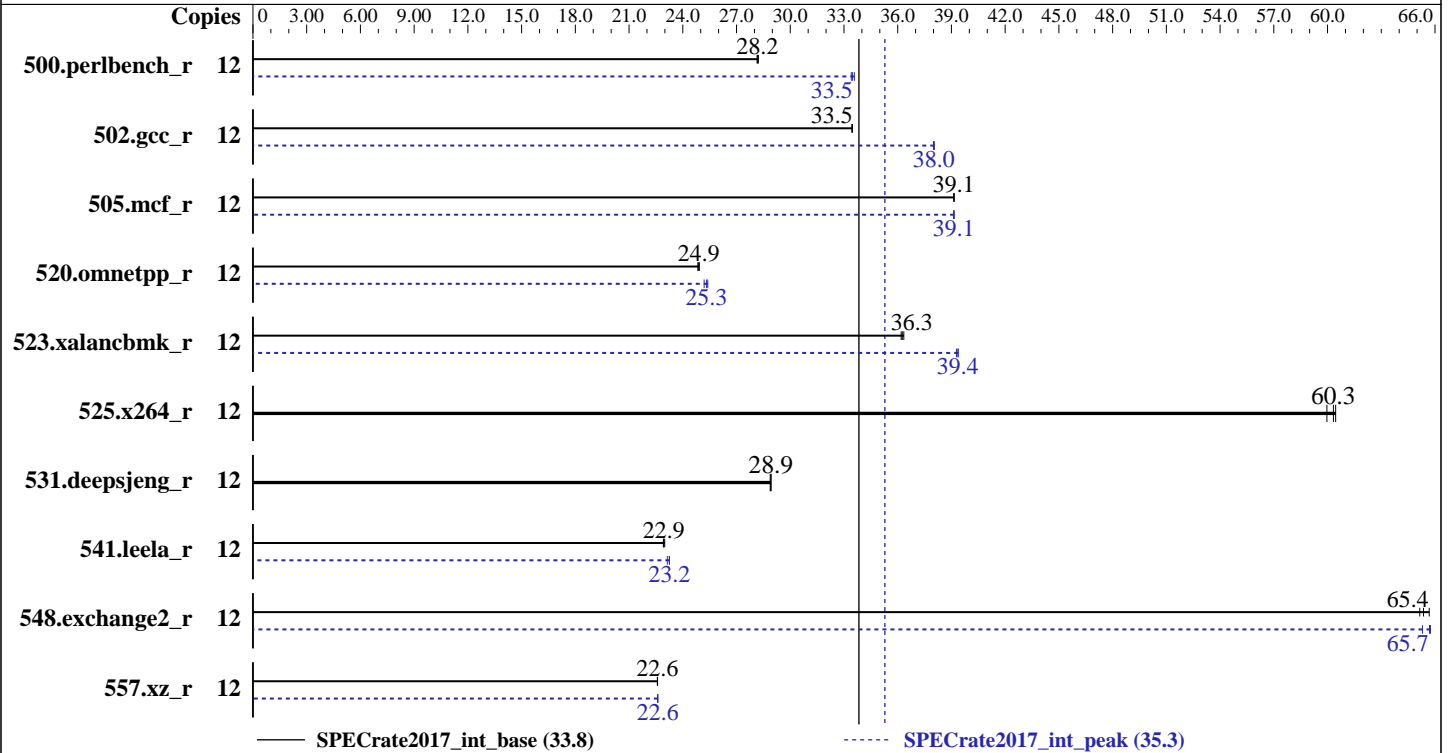

### Hardware

CPU Name: Intel Xeon Bronze 3104  
 Max MHz.: 1700  
 Nominal: 1700  
 Enabled: 12 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 0.31 Released Sep-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jan-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	<b>678</b>	<b>28.2</b>	679	28.2	677	28.2	12	569	33.6	572	33.4	<b>571</b>	<b>33.5</b>
502.gcc_r	12	508	33.4	<b>508</b>	<b>33.5</b>	508	33.5	12	<b>447</b>	<b>38.0</b>	447	38.0	447	38.0
505.mcf_r	12	495	39.2	496	39.1	<b>495</b>	<b>39.1</b>	12	496	39.1	<b>496</b>	<b>39.1</b>	495	39.2
520.omnetpp_r	12	<b>633</b>	<b>24.9</b>	632	24.9	634	24.8	12	<b>622</b>	<b>25.3</b>	625	25.2	620	25.4
523.xalancbmk_r	12	350	36.2	349	36.3	<b>350</b>	<b>36.3</b>	12	<b>322</b>	<b>39.4</b>	322	39.4	323	39.3
525.x264_r	12	350	60.0	348	60.5	<b>348</b>	<b>60.3</b>	12	350	60.0	348	60.5	<b>348</b>	<b>60.3</b>
531.deepsjeng_r	12	<b>476</b>	<b>28.9</b>	476	28.9	475	28.9	12	<b>476</b>	<b>28.9</b>	476	28.9	475	28.9
541.leela_r	12	867	22.9	864	23.0	<b>866</b>	<b>22.9</b>	12	859	23.1	855	23.3	<b>855</b>	<b>23.2</b>
548.exchange2_r	12	<b>481</b>	<b>65.4</b>	483	65.2	479	65.7	12	<b>479</b>	<b>65.7</b>	481	65.3	478	65.7
557.xz_r	12	<b>574</b>	<b>22.6</b>	574	22.6	574	22.6	12	573	22.6	<b>573</b>	<b>22.6</b>	574	22.6

SPECrate2017\_int\_base = 33.8

SPECrate2017\_int\_peak = 35.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jan-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## General Notes (Continued)

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Wed Jan 10 22:13:49 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jan-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

### Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 12
On-line CPU(s) list:   0-11
Thread(s) per core:    1
Core(s) per socket:    6
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping:               4
CPU MHz:                1700.000
BogoMIPS:               3405.02
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               8448K
NUMA node0 CPU(s):     0-5
NUMA node1 CPU(s):     6-11

```

/proc/cpuinfo cache data  
cache size : 8448 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 194709 MB
node 0 free: 189417 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 196608 MB
node 1 free: 191569 MB
node distances:
node   0   1
 0:   10   21
 1:   21   10

```

From /proc/meminfo

```

MemTotal:      394145208 kB
HugePages_Total:      0

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 33.8

## Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jan-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.3 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.3"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.3:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-514.el7.x86\_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 10 04:01

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	859G	50G	810G	6%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.31 09/29/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)  
-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jan-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jan-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jan-2018  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: basepeak = yes
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jan-2018

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 33.8

Huawei CH121 V5 (Intel Xeon Bronze 3104)

SPECrate2017\_int\_peak = 35.3

**CPU2017 License:** 3175

**Test Sponsor:** Huawei

**Tested by:** Huawei

**Test Date:** Jan-2018

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-01-10 09:13:48-0500.

Report generated on 2018-10-31 16:39:43 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.