



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112, 2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

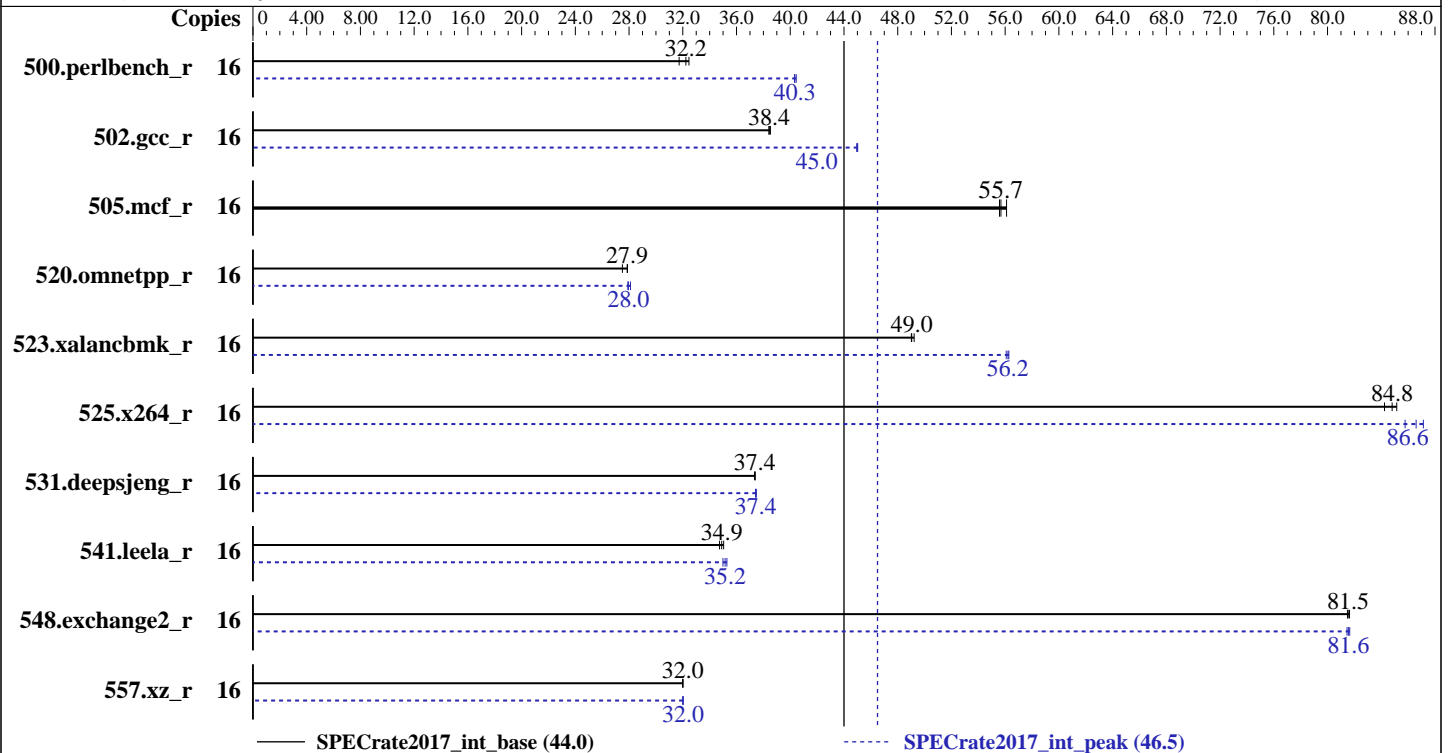

### Hardware

CPU Name: Intel Xeon Silver 4112  
 Max MHz.: 3000  
 Nominal: 2600  
 Enabled: 8 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 384 GB tmpfs  
 Other: 1 x SATA HDD, 1000 GB, 7200 RPM, used for swap

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.114-92.64-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.12 R1.17.0 for D3384-A1x. Released Feb-2018  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112, 2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	803	31.7	785	32.5	<b>790</b>	<b>32.2</b>	16	<b>631</b>	<b>40.3</b>	632	40.3	630	40.4
502.gcc_r	16	588	38.5	590	38.4	<b>589</b>	<b>38.4</b>	16	<b>504</b>	<b>45.0</b>	504	45.0	503	45.0
505.mcf_r	16	<b>464</b>	<b>55.7</b>	465	55.6	461	56.1	16	<b>464</b>	<b>55.7</b>	465	55.6	461	56.1
520.omnetpp_r	16	<b>753</b>	<b>27.9</b>	763	27.5	753	27.9	16	747	28.1	<b>751</b>	<b>28.0</b>	752	27.9
523.xalancbmk_r	16	<b>345</b>	<b>49.0</b>	343	49.2	345	49.0	16	301	56.1	<b>301</b>	<b>56.2</b>	300	56.3
525.x264_r	16	<b>330</b>	<b>84.8</b>	333	84.2	329	85.2	16	327	85.8	322	87.1	<b>324</b>	<b>86.6</b>
531.deepsjeng_r	16	<b>491</b>	<b>37.4</b>	491	37.4	490	37.4	16	<b>490</b>	<b>37.4</b>	490	37.4	489	37.5
541.leela_r	16	756	35.0	763	34.7	<b>759</b>	<b>34.9</b>	16	<b>754</b>	<b>35.2</b>	757	35.0	751	35.3
548.exchange2_r	16	513	81.6	<b>514</b>	<b>81.5</b>	514	81.5	16	513	81.7	515	81.4	<b>514</b>	<b>81.6</b>
557.xz_r	16	540	32.0	540	32.0	<b>540</b>	<b>32.0</b>	16	540	32.0	540	32.0	<b>540</b>	<b>32.0</b>

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-15
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=384g,rw tmpfs /home/memory
Process tuning settings:
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-32:/home/memory/speccpu/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112, 2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

jemalloc:  
configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
DCU Streamer Prefetcher = Disabled  
Override OS Energy Performance = Enabled  
Energy Performance = Performance  
Package C State limit = C0  
LLC Dead Line Alloc = Disabled  
Stale AtoS = Enabled  
Sub NUMA Clustering = Disabled  
IMC Interleaving = 2-way  
Fan Control = Full  
Sysinfo program /home/memory/speccpu/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-RX2540M4 Fri Mar 30 08:29:53 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz  
2 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112, 2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2018  
Hardware Availability: Jul-2017  
Software Availability: Feb-2018

### Platform Notes (Continued)

```
siblings : 8
physical 0: cores 0 1 3 4
physical 1: cores 1 2 4 5
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Thread(s) per core:    2
Core(s) per socket:    4
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Silver 4112 CPU @ 2.60GHz
Stepping:              4
CPU MHz:               2034.836
CPU max MHz:           3000.0000
CPU min MHz:           800.0000
BogoMIPS:              5187.81
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              8448K
NUMA node0 CPU(s):    0-3,8-11
NUMA node1 CPU(s):    4-7,12-15
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep
bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

### Platform Notes (Continued)

```

node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 191643 MB
node 0 free: 182134 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 193383 MB
node 1 free: 193069 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10

```

```

From /proc/meminfo
MemTotal:      394267428 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-RX2540M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018
(c6ce5db) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 30 07:54

```

SPEC is set to: /home/memory/speccpu
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs    384G   8.9G  376G   3% /home/memory

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.17.0 for D3384-Alx  
02/08/2018

Memory:

24x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalanbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Feb-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

## Peak Optimization Flags (Continued)

500.perlbench\_r (continued):

-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -fno-alias

-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib

-ljemalloc

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-64/lib -ljemalloc

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3

-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M4, Intel Xeon Silver 4112,  
2.60GHz

SPECrate2017\_int\_base = 44.0

SPECrate2017\_int\_peak = 46.5

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Mar-2018

**Hardware Availability:** Jul-2017

**Software Availability:** Feb-2018

## Peak Other Flags (Continued)

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-30 08:29:52-0400.

Report generated on 2018-10-31 17:46:59 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-17.