



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

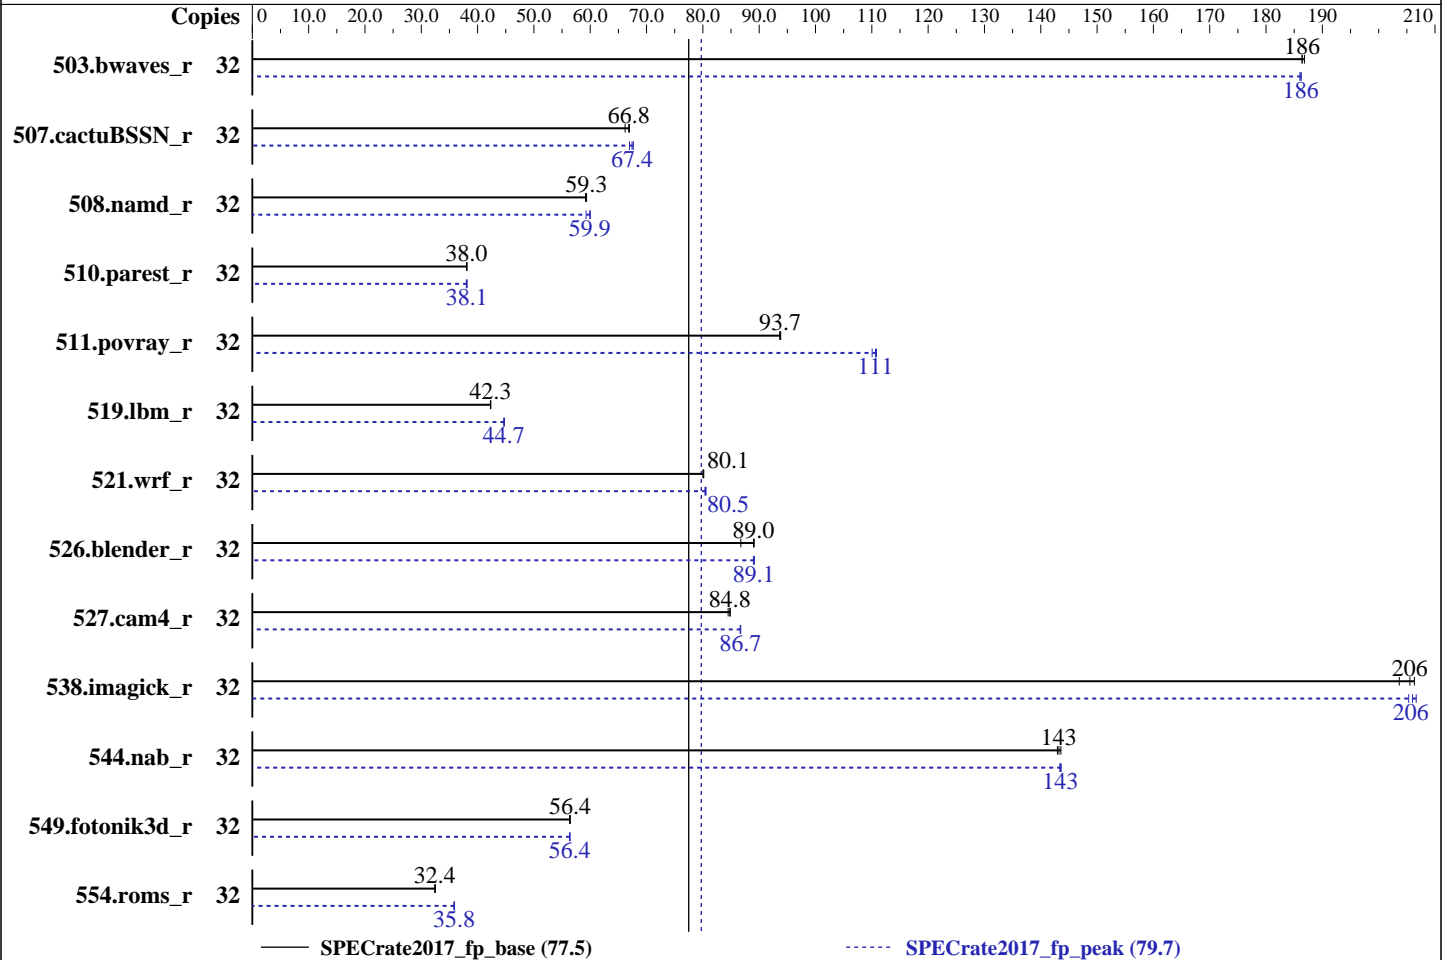

Hardware

CPU Name: Intel Xeon Gold 6130
Max MHz.: 3700
Nominal: 2100
Enabled: 16 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 22 MB I+D on chip per chip
Other: None
Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 2 TB NVMe SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
4.4.114-94.11-default
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.2.199 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Supermicro BIOS version 2.1 released Jun-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1718	187	<u>1721</u>	<u>186</u>	1722	186	32	1723	186	<u>1723</u>	<u>186</u>	1725	186
507.cactuBSSN_r	32	612	66.2	<u>606</u>	<u>66.8</u>	605	67.0	32	<u>601</u>	<u>67.4</u>	605	67.0	599	67.7
508.namd_r	32	512	59.4	514	59.2	<u>512</u>	<u>59.3</u>	32	506	60.0	<u>507</u>	<u>59.9</u>	513	59.3
510.parest_r	32	2195	38.1	<u>2201</u>	<u>38.0</u>	2201	38.0	32	2195	38.1	<u>2199</u>	<u>38.1</u>	2203	38.0
511.povray_r	32	<u>797</u>	<u>93.7</u>	798	93.6	796	93.8	32	679	110	674	111	<u>675</u>	<u>111</u>
519.lbm_r	32	798	42.3	<u>797</u>	<u>42.3</u>	797	42.3	32	753	44.8	755	44.7	<u>755</u>	<u>44.7</u>
521.wrf_r	32	896	80.0	<u>895</u>	<u>80.1</u>	894	80.2	32	<u>891</u>	<u>80.5</u>	892	80.4	890	80.6
526.blender_r	32	562	86.7	<u>548</u>	<u>89.0</u>	547	89.1	32	548	89.0	547	89.1	<u>547</u>	<u>89.1</u>
527.cam4_r	32	662	84.5	659	84.9	<u>660</u>	<u>84.8</u>	32	645	86.7	<u>646</u>	<u>86.7</u>	646	86.6
538.imagick_r	32	386	206	<u>387</u>	<u>206</u>	391	204	32	<u>386</u>	<u>206</u>	385	207	388	205
544.nab_r	32	<u>376</u>	<u>143</u>	377	143	375	144	32	<u>375</u>	<u>143</u>	375	144	376	143
549.fotonik3d_r	32	2209	56.4	<u>2210</u>	<u>56.4</u>	2214	56.3	32	<u>2212</u>	<u>56.4</u>	2214	56.3	2211	56.4
554.roms_r	32	1565	32.5	1568	32.4	<u>1568</u>	<u>32.4</u>	32	1416	35.9	<u>1419</u>	<u>35.8</u>	1420	35.8

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Hardware P-state = Out of Band Mode
SNC = Enable
XPT Prefetch = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
IMC Interleaving = 1-way Interleave
SDDC Plus One = Disable
ADDDC Sparing = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-liai Tue Jun 26 05:42:21 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 1 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     16
Socket(s):               1
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2099.987
BogoMIPS:               4199.97
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-3,8-11,16-19,24-27
NUMA node1 CPU(s):     4-7,12-15,20-23,28-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11 16 17 18 19 24 25 26 27
node 0 size: 95254 MB
node 0 free: 83695 MB
node 1 cpus: 4 5 6 7 12 13 14 15 20 21 22 23 28 29 30 31
node 1 size: 96623 MB
node 1 free: 88740 MB
node distances:
node  0  1
 0:  10  11
 1:  11  10

```

From /proc/meminfo

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

MemTotal: 196483632 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-liai 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 25 18:45
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4 xfs   1.8T   60G  1.8T   4% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.1 06/11/2018
Memory:
2x NO DIMM NO DIMM
6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF, Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

FC 507.cactuBSSN_r(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperStorage 5029P-E1CTR12L (X11SPH-nCTF ,
Intel Xeon Gold 6130)

SPECrate2017_fp_base = 77.5

SPECrate2017_fp_peak = 79.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jun-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-25 17:42:20-0400.
Report generated on 2018-10-31 18:46:44 by CPU2017 PDF formatter v6067.
Originally published on 2018-07-24.