



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### Synergy 660 Gen10


(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

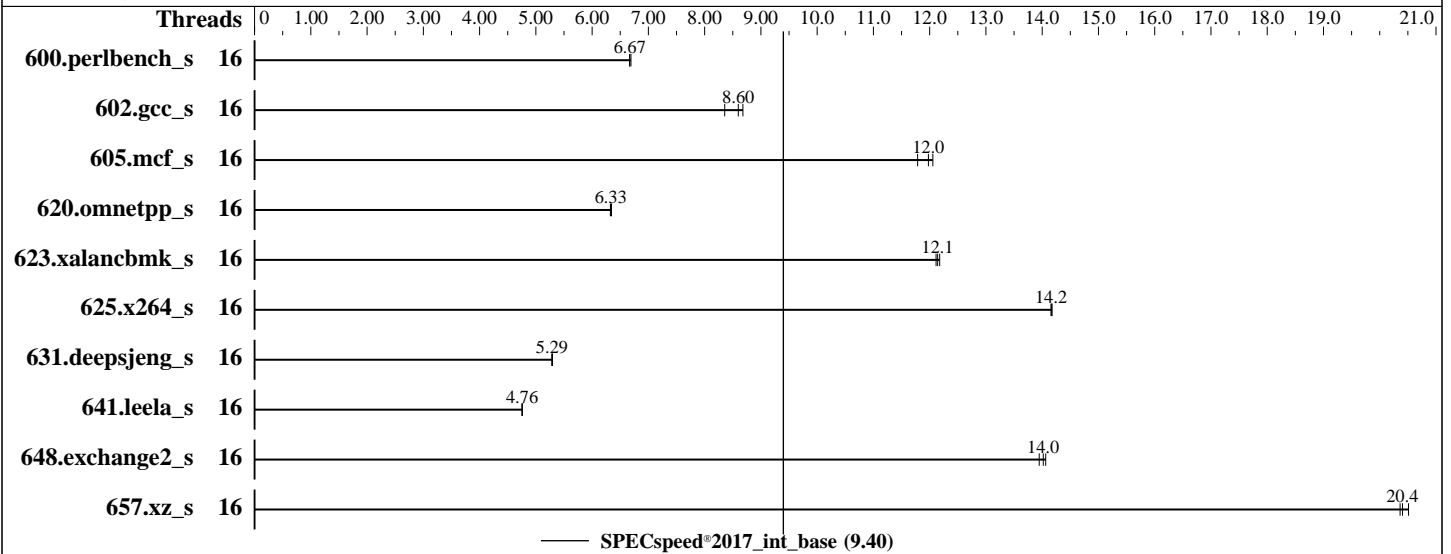

### Hardware

CPU Name: Intel Xeon Gold 5222  
Max MHz: 3900  
Nominal: 3800  
Enabled: 16 cores, 4 chips  
Orderable: 2, 4 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 16.5 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 480 GB SATA SSD, RAID 0  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
Kernel 4.12.14-23-default  
Compiler: C/C++: Version 19.0.2.187 of Intel C/C++  
Compiler Build 20190117 for Linux;  
Fortran: Version 19.0.2.187 of Intel Fortran  
Compiler Build 20190117 for Linux  
Parallel: Yes  
Firmware: HPE BIOS Version I43 02/02/2019 released Apr-2019  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Synergy 660 Gen10

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	<b><u>266</u></b>	<b><u>6.67</u></b>	265	6.69	266	6.67							
602.gcc_s	16	<b><u>463</u></b>	<b><u>8.60</u></b>	477	8.36	459	8.68							
605.mcf_s	16	401	11.8	<b><u>394</u></b>	<b><u>12.0</u></b>	392	12.1							
620.omnetpp_s	16	258	6.32	257	6.34	<b><u>258</u></b>	<b><u>6.33</u></b>							
623.xalancbmk_s	16	116	12.2	117	12.1	<b><u>117</u></b>	<b><u>12.1</u></b>							
625.x264_s	16	125	14.2	<b><u>125</u></b>	<b><u>14.2</u></b>	124	14.2							
631.deepsjeng_s	16	271	5.29	271	5.30	<b><u>271</u></b>	<b><u>5.29</u></b>							
641.leela_s	16	<b><u>359</u></b>	<b><u>4.76</u></b>	359	4.75	359	4.76							
648.exchange2_s	16	211	13.9	209	14.1	<b><u>210</u></b>	<b><u>14.0</u></b>							
657.xz_s	16	301	20.5	304	20.4	<b><u>303</u></b>	<b><u>20.4</u></b>							

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017\_u2/lib/ia32:/home/cpu2017\_u2/lib/intel64:

/home/cpu2017\_u2/je5.0.1-32:/home/cpu2017\_u2/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Enhanced Processor Performance set to Enabled  
Workload Profile set to General Peak Frequency Compute  
Minimum Processor Idle Power Core C-State set to C1E State  
Energy/Performance Bias set to Balanced Power  
Workload Profile set to Custom  
Numa Group Size Optimization set to Flat  
Sysinfo program /home/cpu2017\_u2/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on sy660-gen10 Wed May 22 12:42:04 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
 4 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 5 9 13
physical 1: cores 5 8 9 13
physical 2: cores 5 8 9 13
physical 3: cores 5 8 9 13
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 4
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
Stepping: 7
CPU MHz: 3800.000
BogoMIPS: 7600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 4-7
NUMA node2 CPU(s): 8-11
NUMA node3 CPU(s): 12-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3
node 0 size: 193049 MB
node 0 free: 192665 MB
node 1 cpus: 4 5 6 7
node 1 size: 193534 MB
node 1 free: 193313 MB
node 2 cpus: 8 9 10 11
node 2 size: 193506 MB
node 2 free: 193230 MB
node 3 cpus: 12 13 14 15
node 3 size: 193326 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

node 3 free: 193133 MB

node distances:

node	0	1	2	3
0:	10	21	21	21
1:	21	10	21	21
2:	21	21	10	21
3:	21	21	21	10

From /proc/meminfo

MemTotal: 791978896 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15"

VERSION\_ID="15"

PRETTY\_NAME="SUSE Linux Enterprise Server 15"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15"

uname -a:

Linux sy660-gen10 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 May 22 12:41

SPEC is set to: /home/cpu2017\_u2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	btvfs	445G	114G	331G	26%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I43 02/02/2019

Memory:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

24x UNKNOWN NOT AVAILABLE

24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
          | 625.x264_s(base) 657.xz_s(base)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 648.exchange2_s(base)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 660 Gen10**

(3.80 GHz, Intel Xeon Gold 5222)

SPECspeed®2017\_int\_base = 9.40

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/home/cpu2017_u2/je5.0.1-64/ -ljemalloc

```

C++ benchmarks:

```

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

```

Fortran benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-03.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-03.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-05-22 13:42:04-0400.

Report generated on 2021-09-30 15:40:21 by CPU2017 PDF formatter v6442.

Originally published on 2019-06-25.