



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 144

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: May-2019

Tested by: HPE

Software Availability: Jun-2019

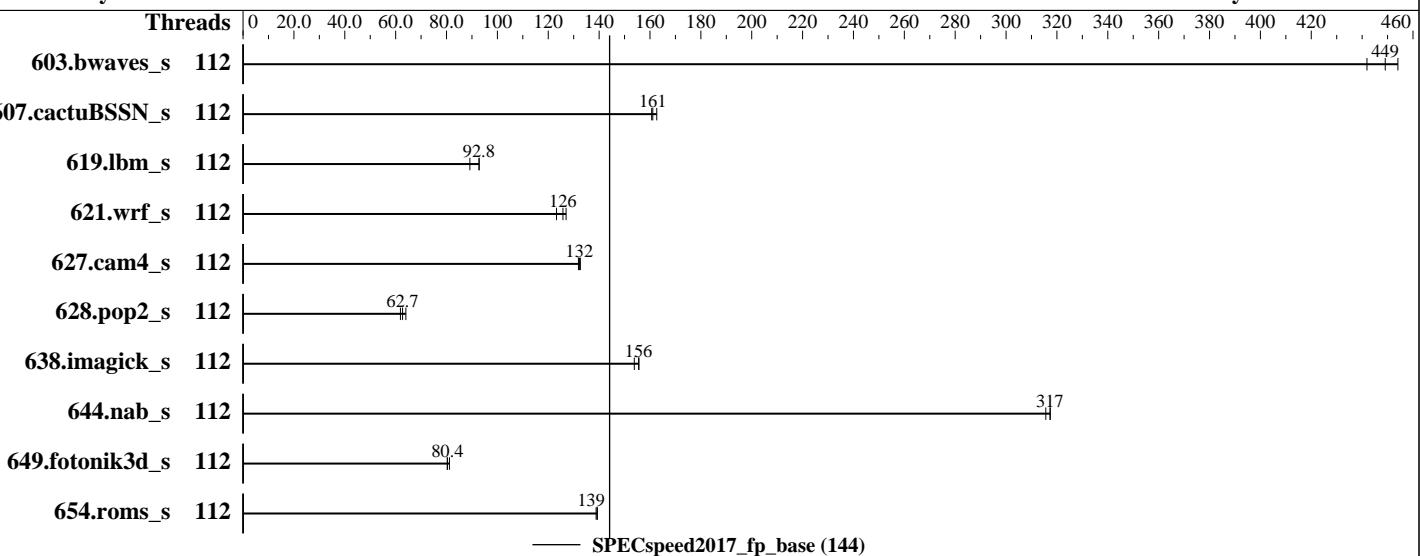

Hardware

CPU Name: Intel Xeon Platinum 8280
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R,
 running at 2666)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: CentOS Linux release 7.6.1810 (Core)
 Kernel 3.10.0-957.21.3.el7.x86_64
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++
 Compiler Build 20190117 for Linux;
 Fortran: Version 19.0.2.187 of Intel Fortran
 Compiler Build 20190117 for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U30 05/21/2019 released May-2019
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 144

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: May-2019

Tested by: HPE

Software Availability: Jun-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	112	<u>131</u>	449	134	442	130	454							
607.cactuBSSN_s	112	102	163	104	161	<u>103</u>	161							
619.lbm_s	112	58.7	89.2	56.4	92.8	56.5	92.8							
621.wrf_s	112	<u>105</u>	126	104	127	107	123							
627.cam4_s	112	66.8	133	<u>67.0</u>	132	67.2	132							
628.pop2_s	112	185	64.0	<u>189</u>	62.7	192	61.9							
638.imagick_s	112	92.7	156	<u>92.7</u>	156	93.8	154							
644.nab_s	112	<u>55.1</u>	317	55.4	316	55.0	317							
649.fotonik3d_s	112	114	80.3	112	81.1	<u>113</u>	80.4							
654.roms_s	112	113	139	113	139	<u>113</u>	139							
SPECspeed2017_fp_base = 144														
SPECspeed2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Workload Profile set to High Performance Compute

Intel Virtualization Technology set to Enabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (2.70 GHz, Intel Xeon Platinum 8280)	SPECspeed2017_fp_base = 144
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Jul-2019
Test Sponsor: HPE	Hardware Availability: May-2019
Tested by: HPE	Software Availability: Jun-2019

Platform Notes (Continued)

```
Sysinfo program /home/cpu2017_u2/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Thu Jul 25 22:37:26 2019
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
    112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

```
From lscpu:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:                7
CPU MHz:                2700.000
BogoMIPS:               5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                39424K
NUMA node0 CPU(s):      0-27,56-83
NUMA node1 CPU(s):      28-55,84-111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (2.70 GHz, Intel Xeon Platinum 8280)	SPECspeed2017_fp_base = 144
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Jul-2019
Test Sponsor: HPE	Hardware Availability: May-2019
Tested by: HPE	Software Availability: Jun-2019

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 0 size: 392883 MB
node 0 free: 346515 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106
107 108 109 110 111
node 1 size: 393215 MB
node 1 free: 363149 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal: 792074384 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.6.1810 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.6 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (2.70 GHz, Intel Xeon Platinum 8280)	SPECspeed2017_fp_base = 144
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Jul-2019
Test Sponsor: HPE	Hardware Availability: May-2019
Tested by: HPE	Software Availability: Jun-2019

Platform Notes (Continued)

```
redhat-release: CentOS Linux release 7.6.1810 (Core)
system-release: CentOS Linux release 7.6.1810 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.21.3.el7.x86_64 #1 SMP Tue Jun 18 16:35:19 UTC
2019 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 5 Jul 18 14:15

```
SPEC is set to: /home/cpu2017_u2
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/centos-home xfs   839G   45G  795G   6% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 05/21/2019

Memory:

```
24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933, configured at 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 607.cactuBSSN_s(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (2.70 GHz, Intel Xeon Platinum 8280)	SPECspeed2017_fp_base = 144 SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Jul-2019 Hardware Availability: May-2019 Software Availability: Jun-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL380 Gen10 (2.70 GHz, Intel Xeon Platinum 8280)	SPECspeed2017_fp_base = 144 SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Jul-2019 Hardware Availability: May-2019 Software Availability: Jun-2019

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.70 GHz, Intel Xeon Platinum 8280)

SPECspeed2017_fp_base = 144

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: May-2019

Software Availability: Jun-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-25 23:37:26-0400.

Report generated on 2019-08-21 12:05:42 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.