



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

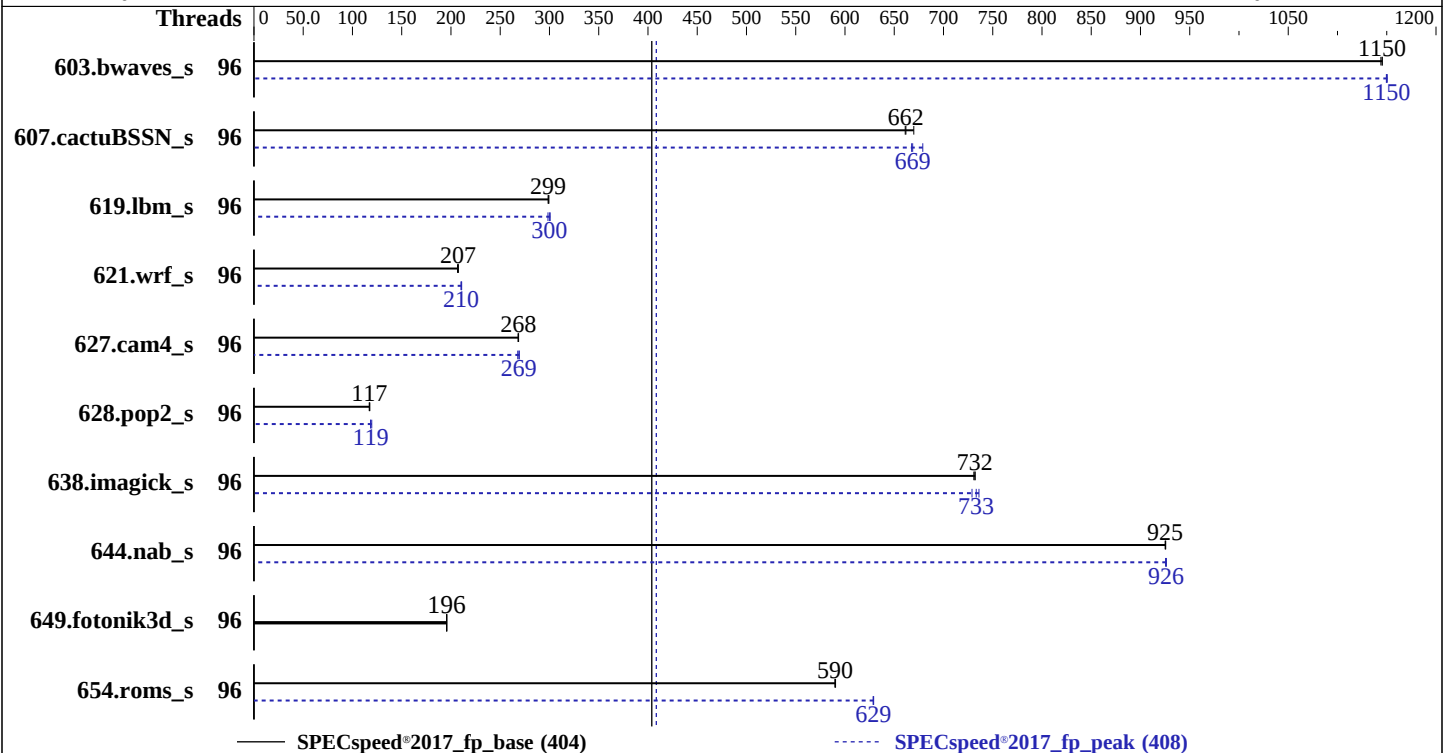

Hardware

CPU Name: AMD EPYC 9655P
Max MHz: 4500
Nominal: 2600
Enabled: 96 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 8 cores
Other: None
Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v2.30 01/17/2025 released Jan-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	<u>51.5</u>	<u>1150</u>	51.5	1150	51.6	1140	96	<u>51.3</u>	<u>1150</u>	51.3	1150	51.3	1150
607.cactuBSSN_s	96	24.9	670	<u>25.2</u>	<u>662</u>	25.2	661	96	<u>24.9</u>	<u>669</u>	24.6	679	25.0	668
619.lbm_s	96	17.5	299	<u>17.5</u>	<u>299</u>	17.5	299	96	17.4	301	<u>17.5</u>	<u>300</u>	17.5	298
621.wrf_s	96	63.7	208	64.0	207	<u>63.8</u>	<u>207</u>	96	<u>62.8</u>	<u>210</u>	62.7	211	62.9	210
627.cam4_s	96	33.0	269	33.1	268	<u>33.0</u>	<u>268</u>	96	33.1	268	<u>33.0</u>	<u>269</u>	32.9	269
628.pop2_s	96	101	118	<u>101</u>	<u>117</u>	101	117	96	100	118	<u>100</u>	<u>119</u>	99.3	120
638.imagick_s	96	<u>19.7</u>	<u>732</u>	19.7	732	19.7	731	96	19.8	729	<u>19.7</u>	<u>733</u>	19.6	736
644.nab_s	96	18.9	926	<u>18.9</u>	<u>925</u>	18.9	925	96	18.9	925	18.9	926	<u>18.9</u>	<u>926</u>
649.fotonik3d_s	96	46.6	196	46.6	196	<u>46.6</u>	<u>196</u>	96	46.6	196	46.6	196	<u>46.6</u>	<u>196</u>
654.roms_s	96	26.7	590	<u>26.7</u>	<u>590</u>	26.7	590	96	25.0	629	25.0	629	<u>25.0</u>	<u>629</u>

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-95"

LD_LIBRARY_PATH =

"/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017_new/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Memory Patrol Scrubbing set to Disabled
Last-Level Cache (LLC) as NUMA Node set to Enabled
ACPI CST C2 Latency set to 18 microseconds
Thermal Configuration set to Maximum Cooling
AMD SMT Option set to Disabled
Workload Profile set to Custom
Power Regulator set to OS Control Mode
The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.3

Sysinfo program /home/cpu2017_new/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Feb 3 19:27:15 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
(36c1e09) x86_64 x86_64 x86_64 GNU/Linux

2. w
19:27:15 up 3:58, 2 users, load average: 0.00, 0.00, 0.00
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.17.1.96 15:30 11.00s 0.94s 0.24s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1546341
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1546341
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fpspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9655P 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 96
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-95
physical id 0: apicids 0-95
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----
7. lscpu
```

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9655P 96-Core Processor
BIOS Model name:	AMD EPYC 9655P 96-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	2
Thread(s) per core:	1
Core(s) per socket:	96
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	107%
CPU max MHz:	2600.0000
CPU min MHz:	1500.0000
BogoMIPS:	5192.16
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_lld debug_swap
Virtualization:	AMD-V
L1d cache:	4.5 MiB (96 instances)
L1i cache:	3 MiB (96 instances)
L2 cache:	96 MiB (96 instances)
L3 cache:	384 MiB (12 instances)
NUMA node(s):	12
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31
NUMA node4 CPU(s):	32-39
NUMA node5 CPU(s):	40-47
NUMA node6 CPU(s):	48-55
NUMA node7 CPU(s):	56-63
NUMA node8 CPU(s):	64-71
NUMA node9 CPU(s):	72-79
NUMA node10 CPU(s):	80-87
NUMA node11 CPU(s):	88-95
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

available: 12 nodes (0-11)

```
node 0 cpus: 0-7
node 0 size: 31938 MB
node 0 free: 31793 MB
node 1 cpus: 8-15
node 1 size: 32253 MB
node 1 free: 32034 MB
node 2 cpus: 16-23
node 2 size: 32253 MB
node 2 free: 32143 MB
node 3 cpus: 24-31
node 3 size: 32253 MB
node 3 free: 32112 MB
node 4 cpus: 32-39
node 4 size: 32253 MB
node 4 free: 32167 MB
node 5 cpus: 40-47
node 5 size: 32253 MB
node 5 free: 32152 MB
node 6 cpus: 48-55
node 6 size: 32253 MB
node 6 free: 32161 MB
node 7 cpus: 56-63
node 7 size: 32253 MB
node 7 free: 32158 MB
node 8 cpus: 64-71
node 8 size: 32177 MB
node 8 free: 32077 MB
node 9 cpus: 72-79
node 9 size: 32253 MB
node 9 free: 32052 MB
node 10 cpus: 80-87
node 10 size: 32253 MB
node 10 free: 32111 MB
node 11 cpus: 88-95
node 11 size: 32215 MB
node 11 free: 32112 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11
0:	10	11	11	11	11	11	11	11	11	11	11	11
1:	11	10	11	11	11	11	11	11	11	11	11	11
2:	11	11	10	11	11	11	11	11	11	11	11	11
3:	11	11	11	10	11	11	11	11	11	11	11	11
4:	11	11	11	11	10	11	11	11	11	11	11	11
5:	11	11	11	11	11	10	11	11	11	11	11	11
6:	11	11	11	11	11	11	10	11	11	11	11	11
7:	11	11	11	11	11	11	11	10	11	11	11	11
8:	11	11	11	11	11	11	11	11	10	11	11	11
9:	11	11	11	11	11	11	11	11	11	10	11	11
10:	11	11	11	11	11	11	11	11	11	11	10	11
11:	11	11	11	11	11	11	11	11	11	11	11	10

9. /proc/meminfo

MemTotal: 395894176 kB

10. who -r

run-level 3 Feb 3 15:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofs autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysex systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant@ pcscd saned@ systemd-userdbd wickedd
indirect	

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=2ecde7f3-1fd0-4b78-b405-d37301501b53
splash=silent
mitigations=auto
quiet
security=apparmor

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

15. cpupower frequency-info

analyzing CPU 42:

current policy: frequency should be within 1.50 GHz and 2.60 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

16. tuned-adm active

No current active profile.

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

18. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

21. Disk information

SPEC is set to: /home/cpu2017_new

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc4	xfs	436G	145G	292G	34%	/home

22. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant DL325 Gen11
Product Family: ProLiant
Serial: DL325G11-010

23. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x Hynix HMC88AHBRA472N 32 GB 2 rank 6400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.30
BIOS Date: 01/17/2025
BIOS Revision: 2.30
Firmware Revision: 1.63

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlbm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlbm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlbm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlbm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

619.lbm_s (continued):

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

638.imagick_s: Same as 619.lbm_s

644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

627.cam4_s (continued):

-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 404

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-03 19:27:14-0500.

Report generated on 2025-05-08 10:01:52 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.