



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

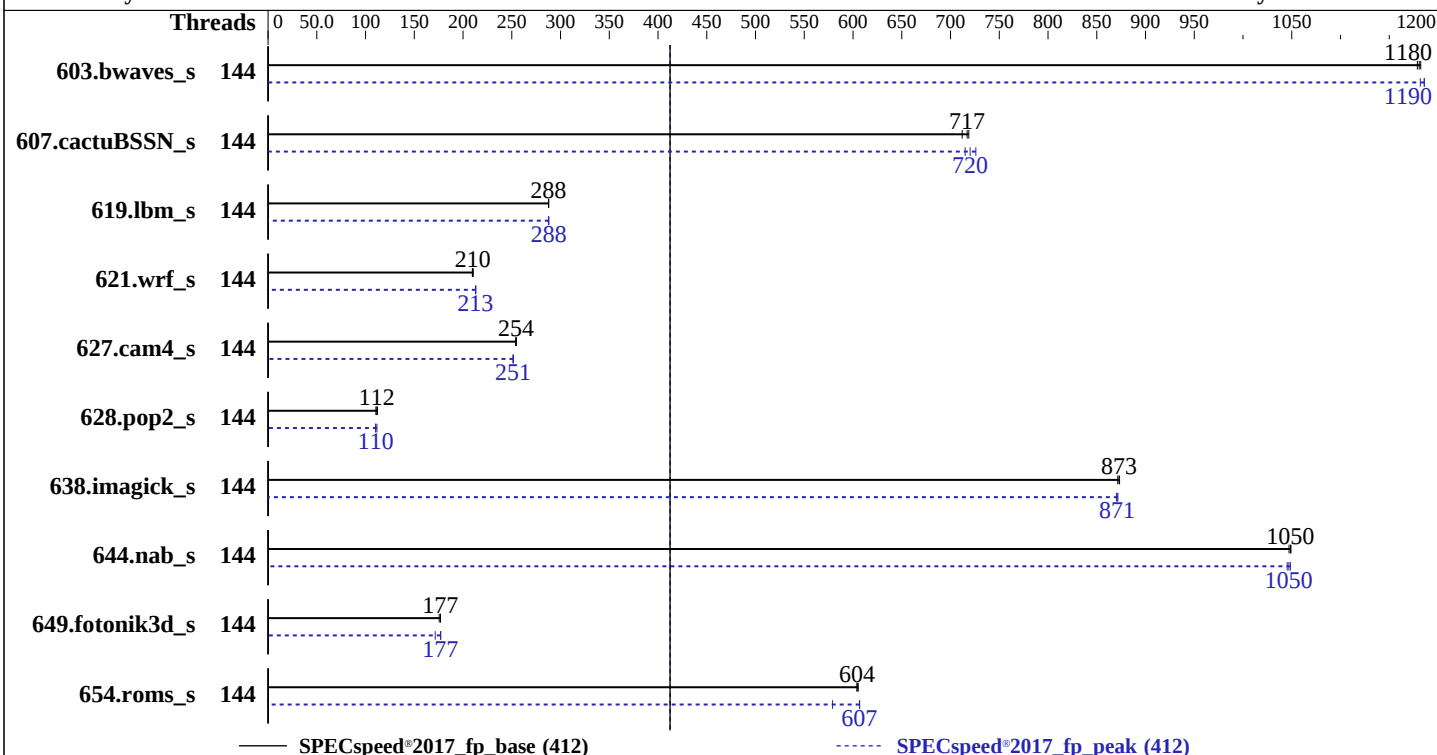

Hardware

CPU Name: AMD EPYC 9825
Max MHz: 3700
Nominal: 2200
Enabled: 144 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 12 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 1.6 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux release 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 00.13.02.04 released Apr-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	144	49.9	1180	<u>50.0</u>	<u>1180</u>	50.0	1180	144	49.9	1180	49.7	1190	<u>49.7</u>	<u>1190</u>		
607.cactuBSSN_s	144	23.2	719	23.4	712	<u>23.2</u>	<u>717</u>	144	23.3	715	<u>23.1</u>	<u>720</u>	23.0	726		
619.lbm_s	144	18.2	288	<u>18.2</u>	<u>288</u>	18.2	288	144	18.2	288	<u>18.2</u>	<u>288</u>	18.2	288		
621.wrf_s	144	<u>63.0</u>	<u>210</u>	62.9	210	63.1	210	144	62.2	213	<u>62.1</u>	<u>213</u>	62.1	213		
627.cam4_s	144	<u>34.8</u>	<u>254</u>	34.9	254	34.8	255	144	35.2	252	<u>35.2</u>	<u>251</u>	35.3	251		
628.pop2_s	144	<u>106</u>	<u>112</u>	107	111	106	112	144	108	110	<u>107</u>	<u>110</u>	106	112		
638.imagick_s	144	16.6	872	<u>16.5</u>	<u>873</u>	16.5	873	144	16.6	870	<u>16.6</u>	<u>871</u>	16.6	872		
644.nab_s	144	16.7	1050	<u>16.7</u>	<u>1050</u>	16.7	1050	144	16.7	1050	<u>16.7</u>	<u>1050</u>	16.7	1050		
649.fotonik3d_s	144	51.9	176	<u>51.5</u>	<u>177</u>	51.5	177	144	51.4	177	<u>51.5</u>	<u>177</u>	53.2	171		
654.roms_s	144	<u>26.1</u>	<u>604</u>	26.0	605	26.1	604	144	<u>26.0</u>	<u>607</u>	25.9	607	27.2	579		

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-143"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "144"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-143"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-143"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

Determinism Control = Manual

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

Determinism Enable = Power
TDP Control = Manual
TDP = 500
PPT Control = Manual
PPT = 500
NUMA Nodes Per Socket = Auto
SMT = Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Apr 16 19:42:11 2025

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
19:42:11 up 1:09, 1 user, load average: 0.07, 0.03, 3.09
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 18:32 11.00s 1.51s 0.14s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3090323
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3090323
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.081/templots/preenv.fpspeed.081.0.log --lognum 081.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101047
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 144
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	144

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

On-line CPU(s) list: 0-143
Vendor ID: AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9825 144-Core Processor
BIOS Model name: AMD EPYC 9825 144-Core Processor
CPU family: 26
Model: 17
Thread(s) per core: 1
Core(s) per socket: 144
Socket(s): 1
Stepping: 0
Frequency boost: enabled
CPU(s) scaling MHz: 60%
CPU max MHz: 3714.6479
CPU min MHz: 1500.0000
BogoMIPS: 4393.80
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap
L1d cache: 6.8 MiB (144 instances)
L1i cache: 4.5 MiB (144 instances)
L2 cache: 144 MiB (144 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP disabled, RSB filling, PBRBS-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6.8M	12	Data	1	64	1	64
L1i	32K	4.5M	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

L2	1M	144M	16 Unified	2	1024	1	64
L3	32M	384M	16 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-143
node 0 size: 772622 MB
node 0 free: 771182 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 791165764 kB

10. who -r

run-level 3 Apr 16 18:32

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dnf-makecache.service	loaded	failed	failed	dnf makecache

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables numad pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

15. cpupower frequency-info
analyzing CPU 17:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 36800MHz

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

18. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.4 (Plow)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.3T	15G	1.3T	2%	/home

22. /sys/devices/virtual/dmi/id

Product: 2158H V8
Product Family: Turin

23. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMC94AHBRA481N 64 GB 2 rank 6400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.13.02.04
BIOS Date: 04/02/2025
BIOS Revision: 2.4

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Base Portability Flags (Continued)

649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

627.cam4_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -Mrecursive  
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

628.pop2_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

```
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fscalar-transform  
-fvector-transform -Mrecursive -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP  
-fremap-arrays -fstrip-mining -fstruct-layout=9  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100  
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9825)

SPECspeed®2017_fp_base = 412

SPECspeed®2017_fp_peak = 412

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-16 07:42:10-0400.

Report generated on 2025-05-08 10:04:04 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.