



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

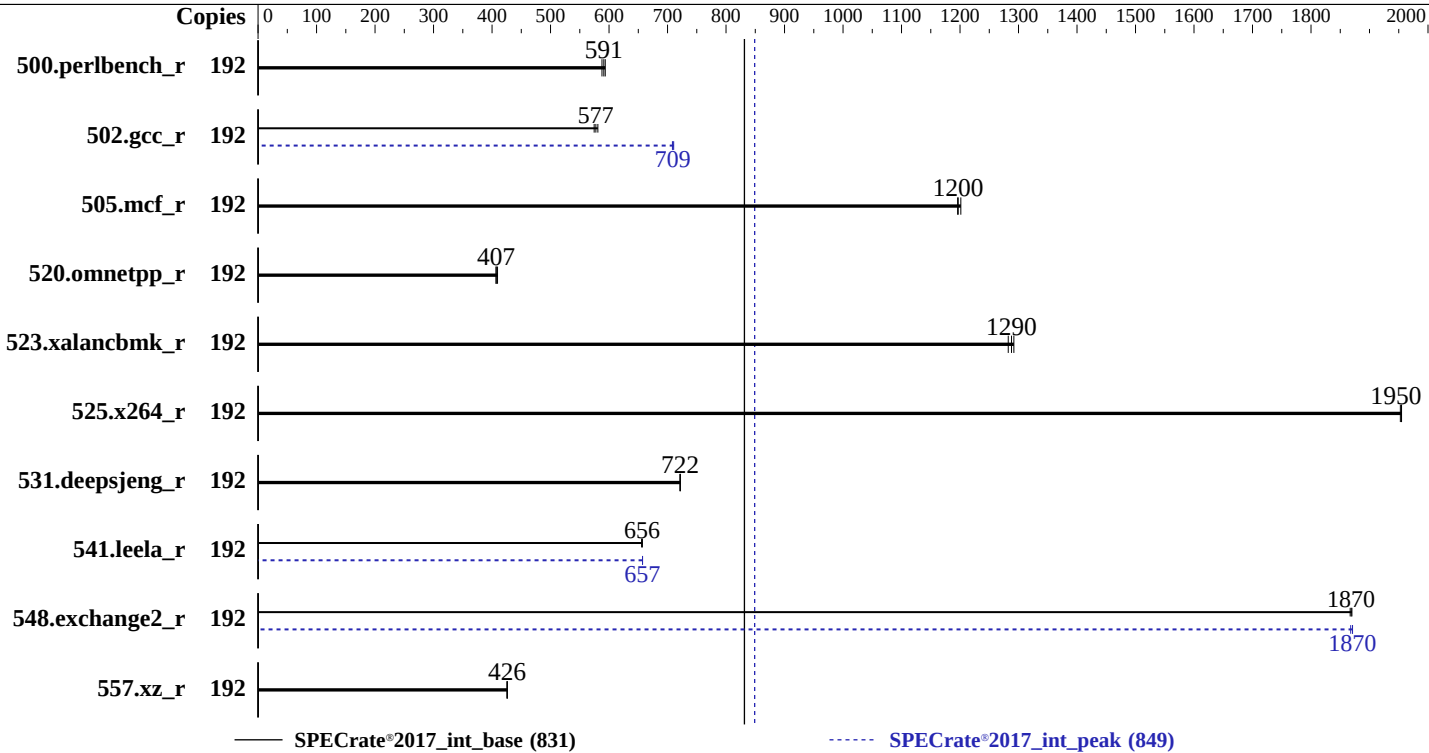

Hardware

CPU Name: AMD EPYC 9654P
Max MHz: 3700
Nominal: 2400
Enabled: 96 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 240 GB M.2 SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
C/C++/Fortran: Version 5.0.0 of AOCC
Compiler: No
Parallel: Version 4.3.5c released Dec-2024
Firmware: btrfs
File System: Run level 3 (multi-user)
System State: 64-bit
Base Pointers: 32/64-bit
Peak Pointers: None
Other: BIOS and OS set to prefer performance at the cost of additional power usage
Power Management:



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	520	588	<u>517</u>	<u>591</u>	515	594	192	520	588	<u>517</u>	<u>591</u>	515	594
502.gcc_r	192	468	581	473	575	<u>471</u>	<u>577</u>	192	<u>383</u>	<u>709</u>	383	711	384	708
505.mcf_r	192	259	1200	258	1200	<u>259</u>	<u>1200</u>	192	259	1200	258	1200	<u>259</u>	<u>1200</u>
520.omnetpp_r	192	615	409	619	407	<u>619</u>	<u>407</u>	192	615	409	619	407	<u>619</u>	<u>407</u>
523.xalancbmk_r	192	158	1280	<u>157</u>	<u>1290</u>	157	1290	192	158	1280	<u>157</u>	<u>1290</u>	157	1290
525.x264_r	192	172	1950	172	1950	<u>172</u>	<u>1950</u>	192	172	1950	172	1950	<u>172</u>	<u>1950</u>
531.deepsjeng_r	192	<u>305</u>	<u>722</u>	305	722	305	721	192	<u>305</u>	<u>722</u>	305	722	305	721
541.leela_r	192	<u>484</u>	<u>656</u>	485	656	484	657	192	<u>484</u>	<u>657</u>	<u>484</u>	<u>657</u>	484	657
548.exchange2_r	192	<u>269</u>	<u>1870</u>	269	1870	269	1870	192	269	1870	269	1870	<u>269</u>	<u>1870</u>
557.xz_r	192	487	426	487	426	<u>487</u>	<u>426</u>	192	487	426	487	426	<u>487</u>	<u>426</u>

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4

Determinism Slider set to Power

DF C-States set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Mar 11 20:29:32 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

-----
2. w
 20:29:32 up 1 min,  1 user,  load average: 0.76, 0.35, 0.13
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              20:28   27.00s  1.35s  0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

-----
3. Username
From environment variable $USER:  root

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094581
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094581
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b intrate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9654P 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size       : 3584 4K pages
cpu cores      : 96
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

siblings : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-95
physical id 0: apicids 0-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      192
On-line CPU(s) list:        0-191
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9654P 96-Core Processor
BIOS Model name:             AMD EPYC 9654P 96-Core Processor
BIOS CPU family:             107
CPU family:                  25
Model:                       17
Thread(s) per core:          2
Core(s) per socket:          96
Socket(s):                   1
Stepping:                    1
Frequency boost:              enabled
CPU(s) scaling MHz:          66%
CPU max MHz:                 3707.8120
CPU min MHz:                 1500.0000
BogoMIPS:                    4792.88
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                             rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                             extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                             sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                             cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                             osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                             perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                             ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                             erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                             clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                             amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                             flushbyasid decodeassists pausefilter pfthreshold avic
                             v_omsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                             ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                             avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                             debug_swap
Virtualization:              AMD-V
L1d cache:                   3 MiB (96 instances)
L1i cache:                   3 MiB (96 instances)
L2 cache:                    96 MiB (96 instances)
L3 cache:                    384 MiB (12 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-23,96-119
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 193183 MB
node 0 free: 192293 MB
node 1 cpus: 24-47,120-143
node 1 size: 193523 MB
node 1 free: 192649 MB
node 2 cpus: 48-71,144-167
node 2 size: 193523 MB
node 2 free: 192700 MB
node 3 cpus: 72-95,168-191
node 3 size: 193442 MB
node 3 free: 192588 MB
node distances:
node 0 1 2 3
0: 10 12 12 12
1: 12 10 12 12
2: 12 12 10 12
3: 12 12 12 10

9. /proc/meminfo

MemTotal: 792240856 kB

10. who -r

run-level 3 Mar 11 20:28

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd munge nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsh udisks2 virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecret virtstoraged ypbind
indirect	pcscd systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=076ee295-de6f-47c7-95ad-f8ccc04c1b41
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 14:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb2 btrfs 224G 8.3G 212G 4% /home

20. /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc
Product: UCSC-C225-M8S
Product Family: Cisco UCS Rack Server
Serial: WZP28199HWP

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
9x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
3x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C225M8.4.3.5c.0.1202241036
BIOS Date: 12/02/2024
BIOS Revision: 5.27



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate[®]2017_int_base = 831

SPECrate[®]2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fvecLib=AMDLibm -ffast-math -fltO
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

541.leela_r (continued):

```
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -flto -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc -ldl
```

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9654P 96 -Core Processor)

SPECrate®2017_int_base = 831

SPECrate®2017_int_peak = 849

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-11 20:29:31-0400.

Report generated on 2025-05-28 23:26:40 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-28.