



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

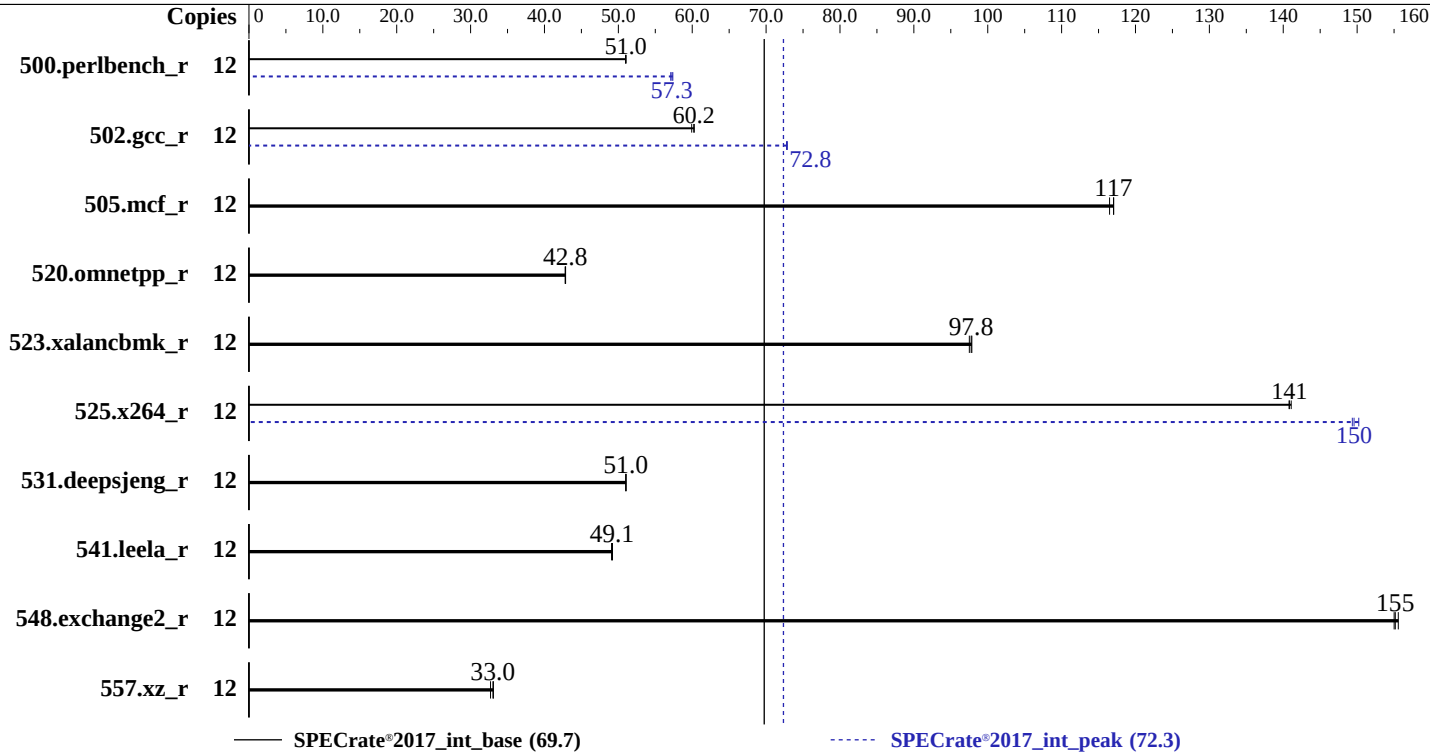

Hardware

CPU Name: Intel Xeon 6333P
Max MHz: 5200
Nominal: 3100
Enabled: 6 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 18 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.5 (Plow)
Kernel 5.14.0-503.11.1.el9_5.x86_64
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version CTE119B 7.10 released Feb-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	374	51.0	<u>375</u>	<u>51.0</u>	375	51.0	12	<u>334</u>	<u>57.3</u>	335	57.1	333	57.4
502.gcc_r	12	282	60.3	284	59.9	<u>282</u>	<u>60.2</u>	12	234	72.8	233	72.9	<u>233</u>	<u>72.8</u>
505.mcf_r	12	166	117	166	116	<u>166</u>	<u>117</u>	12	166	117	166	116	<u>166</u>	<u>117</u>
520.omnetpp_r	12	368	42.8	<u>368</u>	<u>42.8</u>	367	42.9	12	368	42.8	<u>368</u>	<u>42.8</u>	367	42.9
523.xalancbmk_r	12	130	97.5	<u>130</u>	<u>97.8</u>	130	97.8	12	130	97.5	<u>130</u>	<u>97.8</u>	130	97.8
525.x264_r	12	149	141	<u>149</u>	<u>141</u>	149	141	12	<u>140</u>	<u>150</u>	141	149	140	150
531.deepsjeng_r	12	269	51.0	270	51.0	<u>270</u>	<u>51.0</u>	12	269	51.0	270	51.0	<u>270</u>	<u>51.0</u>
541.leela_r	12	404	49.2	405	49.1	<u>404</u>	<u>49.1</u>	12	404	49.2	405	49.1	<u>404</u>	<u>49.1</u>
548.exchange2_r	12	202	156	<u>203</u>	<u>155</u>	203	155	12	202	156	<u>203</u>	<u>155</u>	203	155
557.xz_r	12	392	33.1	396	32.7	<u>392</u>	<u>33.0</u>	12	392	33.1	396	32.7	<u>392</u>	<u>33.0</u>

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-32"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Apr 18 19:17:48 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-46.el9_5.2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-503.11.1.el9_5.x86_64 #1 SMP PREEMPT_DYNAMIC Mon Sep 30 11:54:45 EDT 2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
19:17:48 up 4:45, 0 users, load average: 4.96, 10.04, 11.33
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

data seg size	(kbytes, -d) unlimited
scheduling priority	(-e) 0
file size	(blocks, -f) unlimited
pending signals	(-i) 256698
max locked memory	(kbytes, -l) 8192
max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 256698
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPEccpu_1.01.sh
sh Run705-compliant-ic2024.1-lin-sierraforest-rateint-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=12 --define physicallogical
--define no-numa --reportable --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=12 --define physicallogical
--define no-numa --reportable --tune base,peak --output_format all --define drop_caches --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.692/templogs/preenv.intrate.692.0.log --lognum 692.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6333P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 183
stepping        : 1
microcode       : 0x12c
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 6
siblings        : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0:  core ids 0-5
physical id 0:  apicids 0-11
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	42 bits physical, 48 bits virtual

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

Byte Order: Little Endian
CPU(s): 12
On-line CPU(s) list: 0-11
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6333P
BIOS Model name: Intel(R) Xeon(R) 6333P
CPU family: 6
Model: 183
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s): 1
Stepping: 1
BogoMIPS: 6220.80
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect avx_vnni dtherm ida arat pln pts hfi vnni umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr ibt flush_l1d arch_capabilities VT-x
Virtualization: 288 KiB (6 instances)
L1d cache: 192 KiB (6 instances)
L1i cache: 12 MiB (6 instances)
L2 cache: 18 MiB (1 instance)
L3 cache:
NUMA node(s): 1
NUMA node0 CPU(s): 0-11
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

```
available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 64215 MB
node 0 free: 62793 MB
node distances:
node      0
0:      10
```

```
-----
9. /proc/meminfo
MemTotal:      65756216 kB
```

```
-----
10. who -r
run-level 3 Apr 18 14:32
```

```
-----
11. Systemd service manager version: systemd 252 (252-46.el9_5.2)
Default Target   Status
multi-user       running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
           dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
           mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
           sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime
disabled    systemd-remount-fs
           canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
           chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
           kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
           rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
           systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect    sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
           systemd-sysupdate-reboot
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd4,gpt2)/boot/vmlinuz-5.14.0-503.11.1.el9_5.x86_64
root=UUID=ac8f2e4e-a15f-4475-ba58-5cea8b71de2
ro
resume=UUID=b1768a5a-be88-4ca4-8723-20387600340a
```

```
-----
14. cpupower frequency-info
analyzing CPU 11:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

```
vm.dirty_expire_centisecs    3000
vm.dirty_ratio               20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                 60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.5 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.5 (Plow)
system-release  Red Hat Enterprise Linux release 9.5 (Plow)
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   361G   16G  346G   5% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR250 V3
Product Family: ThinkSystem
Serial:      1234567890
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x SK Hynix HMC688AGBEA081N 32 GB 2 rank 5600, configured at 4400
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Platform Notes (Continued)

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: CTE119B-7.10
BIOS Date: 02/20/2025
BIOS Revision: 7.10
Firmware Revision: 6.10

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V3
(3.10 GHz, Intel Xeon 6333P)

SPECrate®2017_int_base = 69.7

SPECrate®2017_int_peak = 72.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2025

Hardware Availability: Apr-2025

Software Availability: Nov-2024

Peak Optimization Flags (Continued)

525.x264_r: -w -std=c11 -m64 -Wl, -z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cat low-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cat low-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-18 07:17:47-0400.

Report generated on 2025-05-20 15:59:59 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-20.