



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

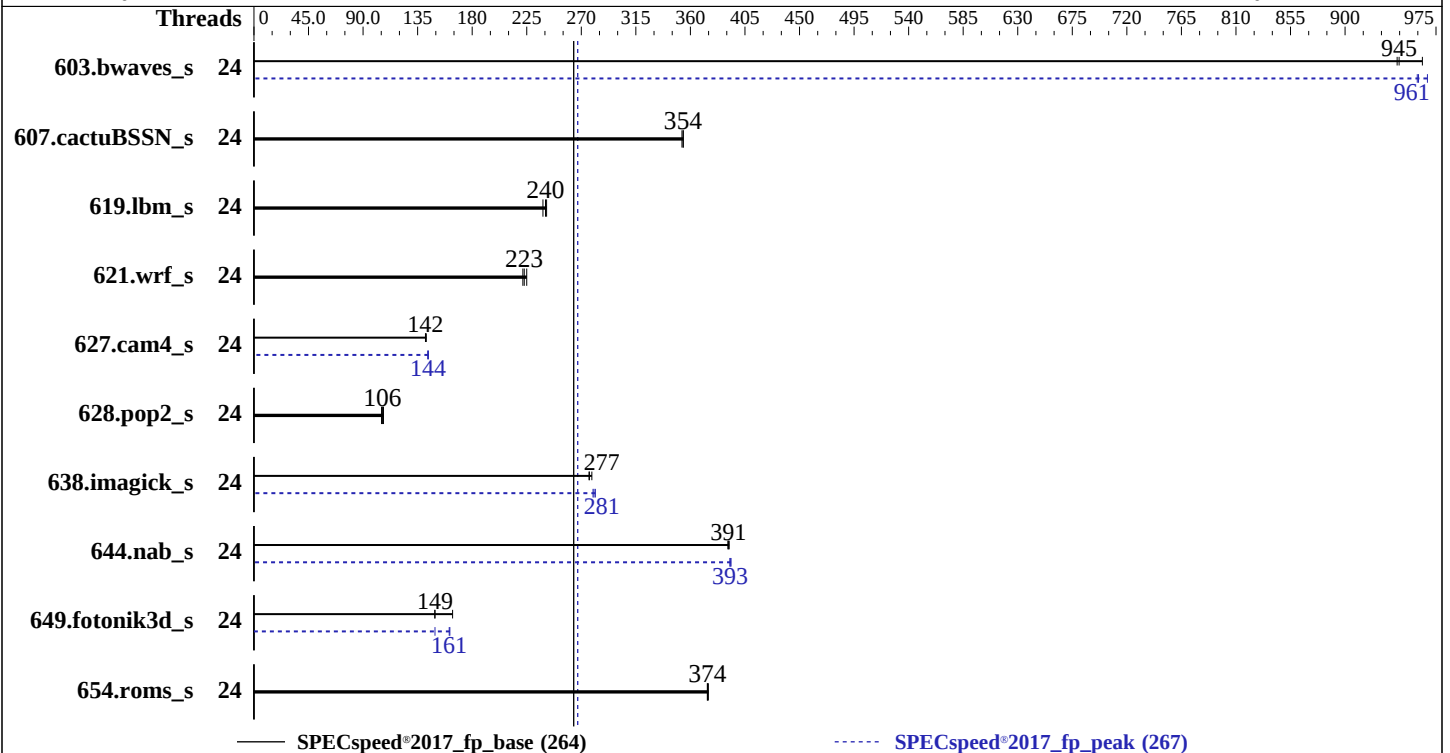

Hardware

CPU Name: AMD EPYC 9275F
Max MHz: 4800
Nominal: 4100
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 3 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 2 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	61.2	964	<u>62.5</u>	<u>945</u>	62.6	943	24	61.0	968	<u>61.4</u>	<u>961</u>	61.5	960
607.cactuBSSN_s	24	47.1	354	47.2	353	<u>47.1</u>	<u>354</u>	24	47.1	354	47.2	353	<u>47.1</u>	<u>354</u>
619.lbm_s	24	22.0	238	21.7	241	<u>21.8</u>	<u>240</u>	24	22.0	238	21.7	241	<u>21.8</u>	<u>240</u>
621.wrf_s	24	59.6	222	<u>59.3</u>	<u>223</u>	58.8	225	24	59.6	222	<u>59.3</u>	<u>223</u>	58.8	225
627.cam4_s	24	<u>62.6</u>	<u>142</u>	62.3	142	62.7	141	24	61.8	143	61.6	144	<u>61.7</u>	<u>144</u>
628.pop2_s	24	113	105	111	107	<u>112</u>	<u>106</u>	24	113	105	111	107	<u>112</u>	<u>106</u>
638.imagick_s	24	52.2	276	<u>52.1</u>	<u>277</u>	51.8	279	24	<u>51.4</u>	<u>281</u>	51.6	280	51.2	282
644.nab_s	24	<u>44.6</u>	<u>391</u>	44.7	391	44.6	392	24	44.5	393	<u>44.5</u>	<u>393</u>	44.4	394
649.fotonik3d_s	24	<u>61.0</u>	<u>149</u>	61.1	149	55.6	164	24	<u>56.6</u>	<u>161</u>	56.4	162	61.0	149
654.roms_s	24	<u>42.1</u>	<u>374</u>	42.1	374	42.0	375	24	<u>42.1</u>	<u>374</u>	42.1	374	42.0	375

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-23"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Sep 9 14:56:38 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 254 (254.10+suse.84.ge8d77af424)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `sysctl`
16. `/sys/kernel/mm/transparent_hugepage`
17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
18. OS release
19. Disk information
20. `/sys/devices/virtual/dmi/id`
21. `dmidecode`
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
14:56:38 up 2:33, 3 users, load average: 6.95, 5.61, 3.49
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
root    pts/1    10.28.68.136:50 12:31    2:24m  0.75s  0.08s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094728
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094728
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.036/temlogs/preenv.fpspeed.036.0.log --lognum 036.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9275F 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002151
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:   core ids 0-2,4-6,8-10,12-14,16-18,20-22,24-26,28-30
physical id 0:   apicids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                48
On-line CPU(s) list:    0-47
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9275F 24-Core Processor
BIOS Model name:        AMD EPYC 9275F 24-Core Processor
BIOS CPU family:        107
CPU family:            26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     24
Socket(s):              1
Stepping:               1

CPU @ 4.1GHz
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Frequency boost: enabled
CPU(s) scaling MHz: 101%
CPU max MHz: 4100.0000
CPU min MHz: 1500.0000
BogoMIPS: 8187.96
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 24 MiB (24 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-2,24-26
NUMA node1 CPU(s): 3-5,27-29
NUMA node2 CPU(s): 6-8,30-32
NUMA node3 CPU(s): 9-11,33-35
NUMA node4 CPU(s): 12-14,36-38
NUMA node5 CPU(s): 15-17,39-41
NUMA node6 CPU(s): 18-20,42-44
NUMA node7 CPU(s): 21-23,45-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-2,24-26

node 0 size: 96449 MB

node 0 free: 95734 MB

node 1 cpus: 3-5,27-29

node 1 size: 96766 MB

node 1 free: 96529 MB

node 2 cpus: 6-8,30-32

node 2 size: 96766 MB

node 2 free: 96526 MB

node 3 cpus: 9-11,33-35

node 3 size: 96766 MB

node 3 free: 96523 MB

node 4 cpus: 12-14,36-38

node 4 size: 96766 MB

node 4 free: 96452 MB

node 5 cpus: 15-17,39-41

node 5 size: 96766 MB

node 5 free: 96484 MB

node 6 cpus: 18-20,42-44

node 6 size: 96727 MB

node 6 free: 96464 MB

node 7 cpus: 21-23,45-47

node 7 size: 96703 MB

node 7 free: 96359 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	12	12	12	12	12	12
1:	11	10	12	12	12	12	12	12
2:	12	12	10	11	12	12	12	12
3:	12	12	11	10	12	12	12	12
4:	12	12	12	12	10	11	12	12
5:	12	12	12	12	11	10	12	12
6:	12	12	12	12	12	12	10	11
7:	12	12	12	12	12	12	11	10

9. /proc/meminfo

MemTotal: 792281608 kB

10. who -r

run-level 5 Sep 9 12:24

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-f-autoconnect oracle postfix purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemud virtxend

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

enabled-runtime wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xencommons
disabled systemd-fsck-root systemd-remount-fs
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait chronyd
clamav-milter clamd console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed
ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewallld
freshclam fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm
iscsi-init iscsid isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord
libvirt-guests logd lunmask lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd
named nfs nfs-blkmap nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount
pacemaker racoon racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd
rtkit-daemon sanlock sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd
spamd spampd speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan
strongswan-starter svnserve sysstat systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-nspawn@ systemd-sysextd systemd-time-wait-sync
systemd-timesyncd tcsd udisks2 update-system-flatpaks upower virtinterfaced virtlockd
virtlogd virtnetworkd virtnodevd virtnwfilterd virtsecretvd virtstoraged vncserver@
vsftpd wdmd winbind wpa_supplicant@ xen-dom0-modules xen-init-dom0
indirect xen-qemu-dom0-disk-backend xen-watchdog xenconsoled xendomains xenstored zebra
pcscd saned@ systemd-userdbd tftpd uidd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=97def8eb-7bcd-4ed3-b3a2-8816e352f9b0
splash=silent
mitigations=auto
quiet
security=apparmor
amd_pstate=active
```

14. cpupower frequency-info

```
analyzing CPU 17:
  current policy: frequency should be within 1.50 GHz and 4.10 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
```

15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       314572800
vm.dirty_background_ratio       0
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.swappiness          1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode   1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 ext4  1.8T   20G  1.7T   2% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant
Serial:      SANJACSCM
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Hynix HMC94AHBRA480N 64 GB 2 rank 6400, configured at 5200
  4x Micron MTC40F2046S1RC64BD2 QSF 64 GB 2 rank 6400, configured at 5200
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     1.20
BIOS Date:        07/11/2025
BIOS Revision:    1.20
Firmware Revision: 1.16
-----
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(4.1 GHz, AMD EPYC 9275F)

SPECspeed®2017_fp_base = 264

SPECspeed®2017_fp_peak = 267

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-09 15:56:38-0400.

Report generated on 2025-11-05 12:06:50 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.