



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

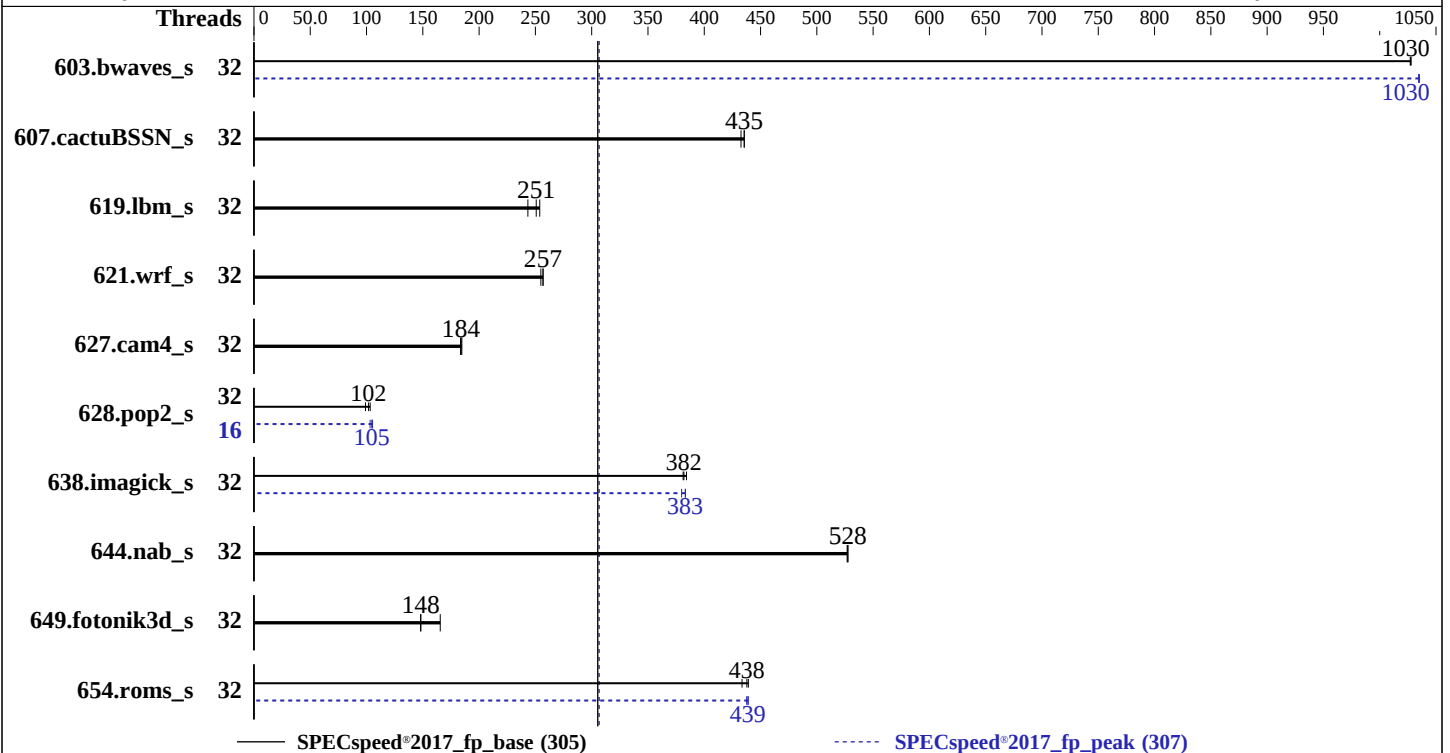

Hardware

CPU Name: AMD EPYC 9375F
Max MHz: 4800
Nominal: 3800
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 1.8 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	57.4	1030	57.4	1030	57.4	1030	32	57.0	1030	57.0	1030	57.0	1040
607.cactuBSSN_s	32	38.5	433	38.3	435	38.3	436	32	38.5	433	38.3	435	38.3	436
619.lbm_s	32	20.6	254	21.5	243	20.9	251	32	20.6	254	21.5	243	20.9	251
621.wrf_s	32	51.9	255	51.5	257	51.5	257	32	51.9	255	51.5	257	51.5	257
627.cam4_s	32	48.0	185	48.2	184	48.3	183	32	48.0	185	48.2	184	48.3	183
628.pop2_s	32	120	99.1	115	103	117	102	16	113	105	113	105	115	103
638.imagick_s	32	37.8	381	37.5	384	37.8	382	32	37.7	383	37.6	383	38.0	380
644.nab_s	32	33.2	527	33.1	528	33.1	528	32	33.2	527	33.1	528	33.1	528
649.fotonik3d_s	32	61.6	148	61.5	148	55.1	165	32	61.6	148	61.5	148	55.1	165
654.roms_s	32	36.3	434	35.9	439	36.0	438	32	36.0	438	35.9	439	35.9	439

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-63"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on r15-bm-02 Tue Aug 26 11:29:59 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
   Linux r15-bm-02 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
   x86_64 x86_64 x86_64 GNU/Linux
-----

2. w
   11:29:59 up 11:09,  4 users,  load average: 7.04, 5.71, 3.55
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      pts/1    10.28.68.136:S.0 12:28    2:25m  0.87s  0.17s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
-----

3. Username
   From environment variable $USER:  root
-----

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094676
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094676
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
SCREEN -S cpu
/bin/bash
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/temlogs/preenv.fpspeed.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9375F 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002151
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 32
siblings       : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	64
On-line CPU(s) list:	0-63
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9375F 32-Core Processor
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	97%
CPU max MHz:	3800.0000
CPU min MHz:	1500.0000
BogoMIPS:	7599.77
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

AMD-V

1.5 MiB (32 instances)

1 MiB (32 instances)

32 MiB (32 instances)

256 MiB (8 instances)

4

0-7,32-39

8-15,40-47

16-23,48-55

24-31,56-63

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Mitigation; Speculative Store Bypass disabled via prctl

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Not affected

Not affected

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7,32-39

node 0 size: 193176 MB

node 0 free: 192506 MB

node 1 cpus: 8-15,40-47

node 1 size: 193531 MB

node 1 free: 192977 MB

node 2 cpus: 16-23,48-55

node 2 size: 193531 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 2 free: 192915 MB
node 3 cpus: 24-31,56-63
node 3 size: 193460 MB
node 3 free: 192456 MB
node distances:
node   0   1   2   3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10
```

```
9. /proc/meminfo
MemTotal:      792268700 kB
```

```
10. who -r
run-level 5 Jul 7 07:00
```

```
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
Default Target    Status
graphical         degraded
```

```
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* yast-timesync.service loaded failed failed One time sync configured by YaST
```

```
13. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
           bluetooth chronyd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings
           klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect oracle postfix
           purge-kernels rollback rsyslog sapconf smartd sshd systemctl-logger systemd-pstore virtqemud
           virtxend wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
           xencommons
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
           apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
           boot-systemd booth-arbitrator booth@ ca-certificates certmonger chrony-wait clamav-milter
           clamd clamonnacc console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed
           ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
           drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewallld
           fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid
           isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
           lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
           nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
           racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
           sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spamd
           speech-dispatcher squid srp_daemon srp_daemon_port@ strongswan strongswan-starter
           svnserve sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator
           systemd-nspawn@ systemd-sysextd systemd-time-wait-sync systemd-timesyncd tcshd udisks2
           update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodeudev
           virtnwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
           xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsoled
           xendomains xenstored zebra
indirect    pcsd saned@ systemd-userdbd tftpd uidd wickedd
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=566b550a-b4e8-48d0-9bfc-e3063e24f965
splash=silent
mitigations=auto
quiet
security=apparmor
```

15. cpupower frequency-info

```
analyzing CPU 18:
  current policy: frequency should be within 1.50 GHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

16. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      314572800
vm.dirty_background_ratio      0
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	ext4	1.8T	20G	1.7T	2%	/

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: HPE ProLiant Compute DL345 Gen12
Product Family: ProLiant
Serial: SANJACSCM

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Hynix HMC94AHBRA480N 64 GB 2 rank 6400, configured at 5200
1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
2x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 07/11/2025
BIOS Revision: 1.20
Firmware Revision: 1.16

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(3.80 GHz, AMD EPYC 9375F)

SPECspeed®2017_fp_base = 305

SPECspeed®2017_fp_peak = 307

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-26 12:29:58-0400.

Report generated on 2025-11-19 10:39:50 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.