



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

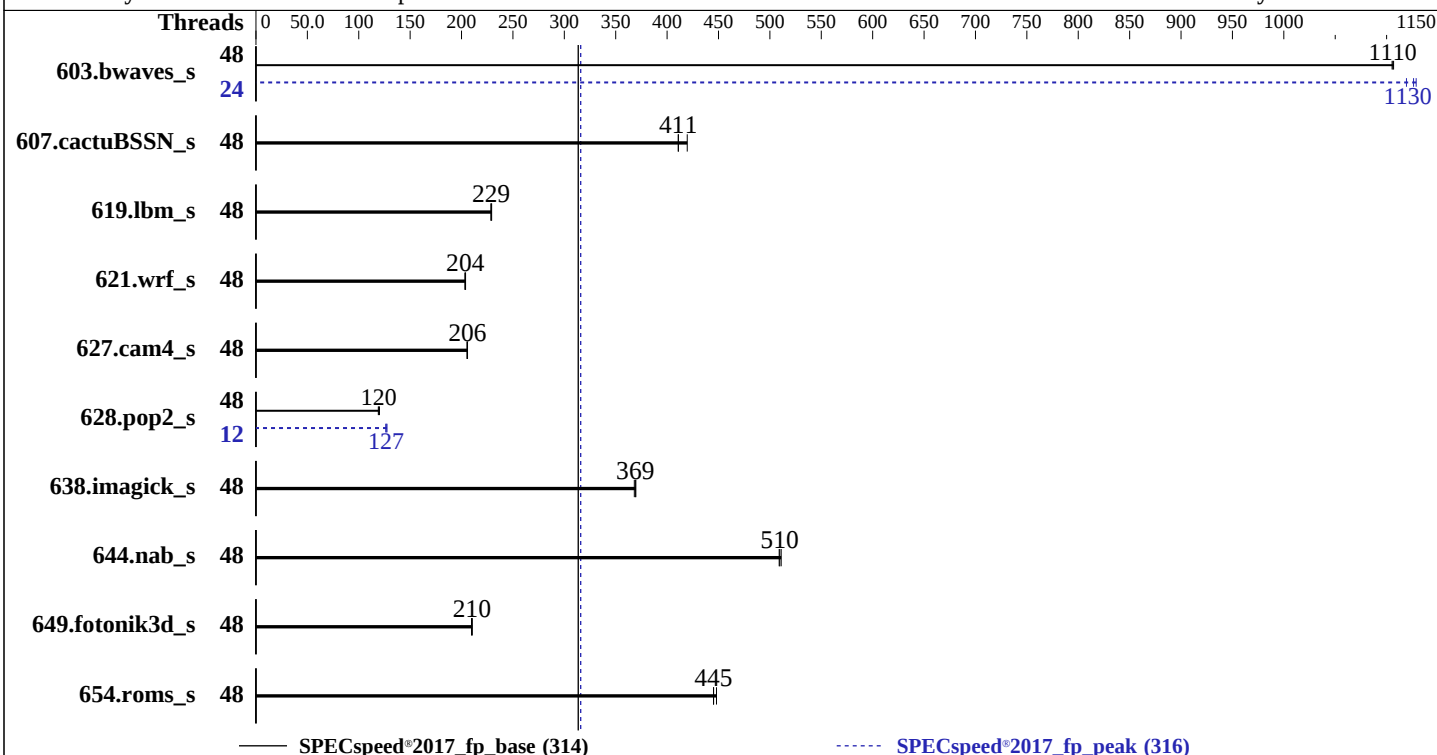

## Hardware

CPU Name: AMD EPYC 9275F  
Max MHz: 4800  
Nominal: 4100  
Enabled: 24 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
32 MB shared / 3 cores  
Other: None  
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 1 x 3.2 TB PCIe NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86\_64)  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 0302 released Jun-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Results Table

| Benchmark       | Base    |             |            |             |            |             |             |         | Peak        |            |             |            |             |             |         |       |
|-----------------|---------|-------------|------------|-------------|------------|-------------|-------------|---------|-------------|------------|-------------|------------|-------------|-------------|---------|-------|
|                 | Threads | Seconds     | Ratio      | Seconds     | Ratio      | Seconds     | Ratio       | Threads | Seconds     | Ratio      | Seconds     | Ratio      | Seconds     | Ratio       | Seconds | Ratio |
| 603.bwaves_s    | 48      | 53.4        | 1110       | 53.3        | 1110       | <u>53.3</u> | <u>1110</u> | 24      | 52.7        | 1120       | 52.3        | 1130       | <u>52.4</u> | <u>1130</u> |         |       |
| 607.cactuBSSN_s | 48      | 39.7        | 420        | 40.6        | 411        | <u>40.6</u> | <u>411</u>  | 48      | 39.7        | 420        | 40.6        | 411        | <u>40.6</u> | <u>411</u>  |         |       |
| 619.lbm_s       | 48      | 22.9        | 229        | <u>22.9</u> | <u>229</u> | 22.8        | 229         | 48      | 22.9        | 229        | <u>22.9</u> | <u>229</u> | 22.8        | 229         |         |       |
| 621.wrf_s       | 48      | <u>64.9</u> | <u>204</u> | 64.9        | 204        | 65.1        | 203         | 48      | <u>64.9</u> | <u>204</u> | 64.9        | 204        | 65.1        | 203         |         |       |
| 627.cam4_s      | 48      | 43.1        | 206        | <u>43.1</u> | <u>206</u> | 43.2        | 205         | 48      | 43.1        | 206        | <u>43.1</u> | <u>206</u> | 43.2        | 205         |         |       |
| 628.pop2_s      | 48      | 99.7        | 119        | <u>99.3</u> | <u>120</u> | 98.8        | 120         | 12      | 93.1        | 128        | <u>93.7</u> | <u>127</u> | 94.0        | 126         |         |       |
| 638.imagick_s   | 48      | <u>39.1</u> | <u>369</u> | 39.0        | 370        | 39.2        | 368         | 48      | <u>39.1</u> | <u>369</u> | 39.0        | 370        | 39.2        | 368         |         |       |
| 644.nab_s       | 48      | <u>34.3</u> | <u>510</u> | 34.2        | 511        | 34.3        | 509         | 48      | <u>34.3</u> | <u>510</u> | 34.2        | 511        | 34.3        | 509         |         |       |
| 649.fotonik3d_s | 48      | 43.5        | 210        | 43.3        | 210        | <u>43.4</u> | <u>210</u>  | 48      | 43.5        | 210        | 43.3        | 210        | <u>43.4</u> | <u>210</u>  |         |       |
| 654.roms_s      | 48      | 35.1        | 448        | <u>35.4</u> | <u>445</u> | 35.4        | 445         | 48      | 35.1        | 448        | <u>35.4</u> | <u>445</u> | 35.4        | 445         |         |       |

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
OS set to performance mode via cpupower frequency-set -g performance  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-47"

LD\_LIBRARY\_PATH =

"/aocc500A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/aocc500A1/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "48"

Environment variables set by runcpu during the 603.bwaves\_s peak run:

GOMP\_CPU\_AFFINITY = "0-23"

Environment variables set by runcpu during the 628.pop2\_s peak run:

GOMP\_CPU\_AFFINITY = "0-11"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

L1 Stride Prefetcher = Disabled

APBDIS = 1

Determinism Control = Manual

DRAM Scrub time = Disabled

Engine Boost = Aggressive

TDP Control = Manual

TDP = 400

PPT Control = Manual

PPT = 400

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocc500A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Nov 14 08:38:10 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
08:38:10 up 1 min, 1 user, load average: 1.13, 0.50, 0.19
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 08:37 14.00s 0.71s 0.04s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3091734
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3091734
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```
login -- root
-bash
/bin/bash ./speed.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.443/templogs/preenv.fpspeed.443.0.log --lognum 443.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocc500A1
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9275F 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002147
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0:  apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

|                      |                                                                                                                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Architecture:        | x86_64                                                                                                                                                                                                          |
| CPU op-mode(s):      | 32-bit, 64-bit                                                                                                                                                                                                  |
| Address sizes:       | 52 bits physical, 57 bits virtual                                                                                                                                                                               |
| Byte Order:          | Little Endian                                                                                                                                                                                                   |
| CPU(s):              | 48                                                                                                                                                                                                              |
| On-line CPU(s) list: | 0-47                                                                                                                                                                                                            |
| Vendor ID:           | AuthenticAMD                                                                                                                                                                                                    |
| BIOS Vendor ID:      | Advanced Micro Devices, Inc.                                                                                                                                                                                    |
| Model name:          | AMD EPYC 9275F 24-Core Processor                                                                                                                                                                                |
| BIOS Model name:     | AMD EPYC 9275F 24-Core Processor                                                                                                                                                                                |
| BIOS CPU family:     | 107                                                                                                                                                                                                             |
| CPU family:          | 26                                                                                                                                                                                                              |
| Model:               | 2                                                                                                                                                                                                               |
| Thread(s) per core:  | 2                                                                                                                                                                                                               |
| Core(s) per socket:  | 24                                                                                                                                                                                                              |
| Socket(s):           | 1                                                                                                                                                                                                               |
| Stepping:            | 1                                                                                                                                                                                                               |
| Frequency boost:     | enabled                                                                                                                                                                                                         |
| CPU(s) scaling MHz:  | 85%                                                                                                                                                                                                             |
| CPU max MHz:         | 4816.6992                                                                                                                                                                                                       |
| CPU min MHz:         | 1500.0000                                                                                                                                                                                                       |
| BogoMIPS:            | 8187.27                                                                                                                                                                                                         |
| Flags:               | fpu_vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat<br>pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb<br>rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

extd\_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid  
sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm  
cmp\_legacy extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch  
osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext  
perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2  
ibrs ibpb stibp ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2  
smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt  
xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf  
xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi  
avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect  
movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect  
flush\_lld debug\_swap

L1d cache: 1.1 MiB (24 instances)  
L1i cache: 768 KiB (24 instances)  
L2 cache: 24 MiB (24 instances)  
L3 cache: 256 MiB (8 instances)

NUMA node(s): 1  
NUMA node0 CPU(s): 0-47

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 1.1M     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 768K     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 24M      | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 256M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-47

node 0 size: 772959 MB

node 0 free: 772096 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 791510676 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

-----  
10. who -r  
run-level 3 Nov 14 08:36  
-----

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running  
-----

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix  
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd-generate-opts snmpd snmptrapd svnserve systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd tuned udisks2  
indirect systemd-userdbd wickedd  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=8bcfd5a5-8f30-49cc-9aa9-2e306fa29252  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
video=1024x768  
-----

14. cpupower frequency-info  
analyzing CPU 47:  
current policy: frequency should be within 1.50 GHz and 4.10 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
-----

15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance  
-----

16. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```
vm.dirty_expire_centisecs    3000
vm.dirty_ratio               8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                 1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
20. Disk information
SPEC is set to: /aocc500A1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   2.8T   98G  2.7T   4% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS520QA-E13-RS8U
Product Family: Server
Serial:      /psn/
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  6x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400
  6x Samsung M321R8GA0EB2-CCPWC 64 GB 2 rank 6400
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.

BIOS Version: 0302

BIOS Date: 06/26/2025

BIOS Revision: 3.2

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1377 2024\_09\_24)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin  
=====



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt  
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100  
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Nov-2025

**Hardware Availability:** Jun-2025

**Software Availability:** Oct-2024

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP

-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math

-fopenmp -fscalar-transform -fvector-transform

-mllvm -reduce-array-computations=3 -Mrecursive

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fscalar-transform  
-fvector-transform -Mrecursive -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520QA-E13-RS8U  
(4.10 GHz, AMD EPYC 9275F)

SPECspeed®2017\_fp\_base = 314

SPECspeed®2017\_fp\_peak = 316

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2025

Hardware Availability: Jun-2025

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-11-13 19:38:09-0500.  
Report generated on 2025-12-03 14:21:53 by CPU2017 PDF formatter v6716.  
Originally published on 2025-12-02.