



SPEC ACCEL™ OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology EPYC 7742 CPU ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

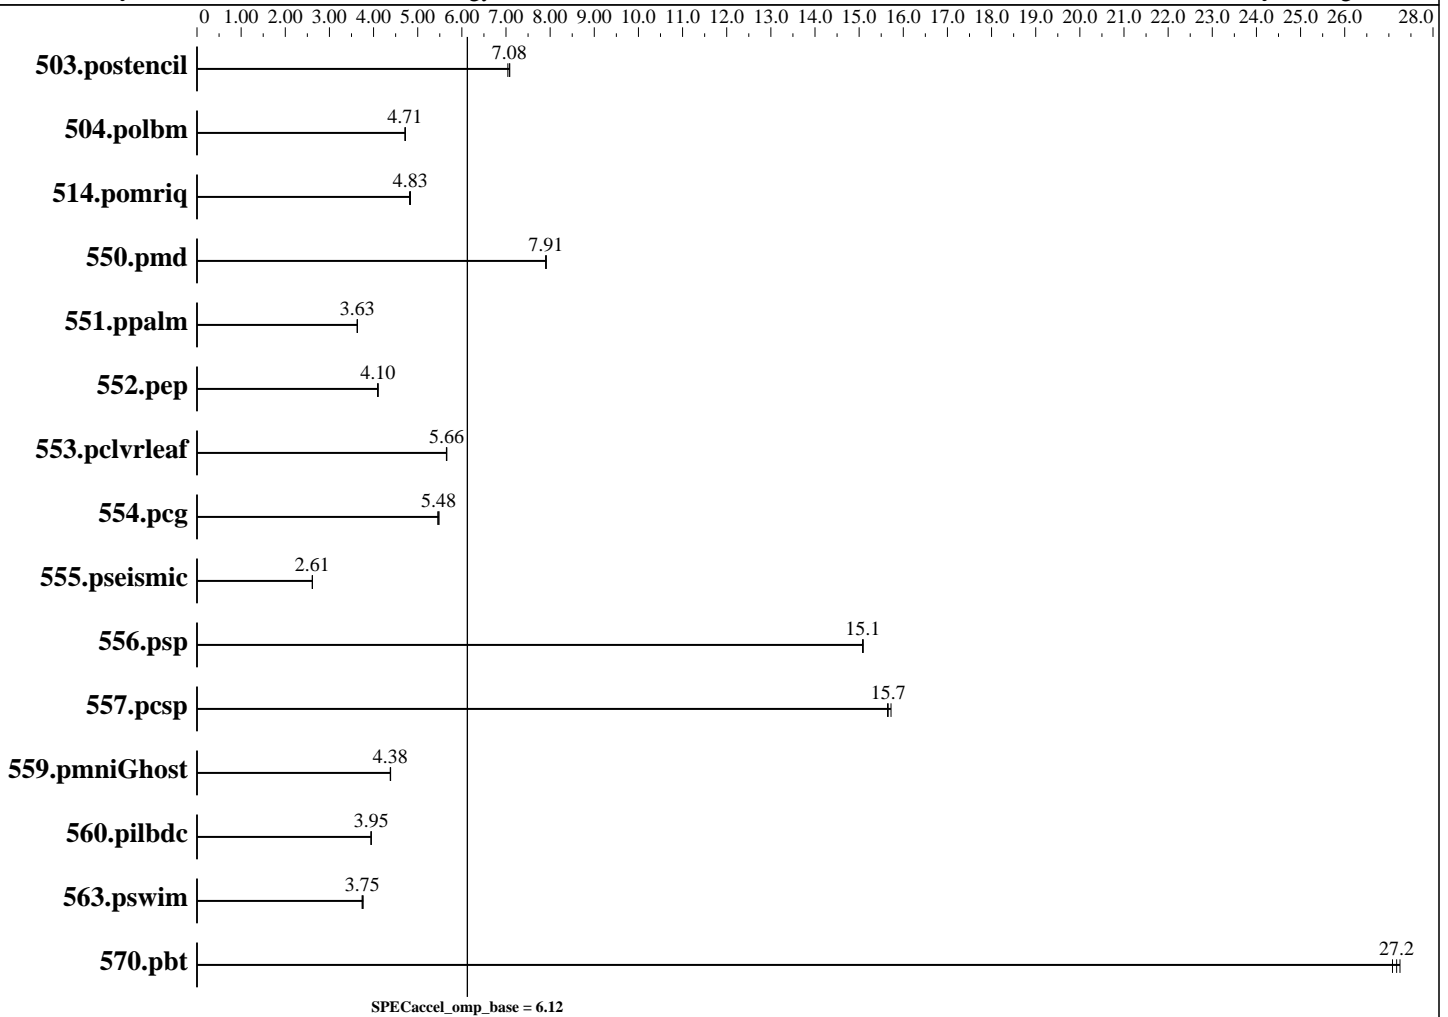

Hardware

CPU Name: AMD EPYC 7742 CPU
 CPU Characteristics: Turbo up to 3.4 GHz
 CPU MHz: 2250
 CPU MHz Maximum: 3400
 FPU: Integrated
 CPU(s) enabled: 64 cores, 1 chip, 64 cores/chip, 2 threads/core
 CPU(s) orderable: 1 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 256 MB I+D on chip per chip
 16 MB shared / 4 cores

Continued on next page

Accelerator

Accel Model Name: EPYC 7742 CPU
 Accel Vendor: AMD
 Accel Name: EPYC 7742 CPU
 Type of Accel: CPU
 Accel Connection: Not applicable
 Does Accel Use ECC: yes
 Accel Description: 1 x AMD EPYC 7742 CPU
 Accel Driver: Not applicable



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7742 CPU
ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Hardware (Continued)

Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
Disk Subsystem: 1 x 480 GB SATA 2.5" SSD
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP4,
kernel 4.12.14-94.41-default
Compiler: Intel C/C++/Fortran 19.0 Update 4 for Linux
Version 19.0.4 Build 20190416
File System: xfs
System State: Run-level 3
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.postencil	15.5	7.04	15.4	7.09	<u>15.4</u>	<u>7.08</u>						
504.polbm	<u>25.9</u>	<u>4.71</u>	25.8	4.72	25.9	4.71						
514.pomriq	<u>128</u>	<u>4.83</u>	129	4.82	128	4.84						
550.pmd	<u>30.5</u>	<u>7.91</u>	30.5	7.90	30.5	7.91						
551.ppalm	150	3.63	150	3.63	<u>150</u>	<u>3.63</u>						
552.pep	56.3	4.10	56.5	4.09	<u>56.3</u>	<u>4.10</u>						
553.pclvrleaf	202	5.66	203	5.65	<u>202</u>	<u>5.66</u>						
554.pcg	61.1	5.45	60.7	5.48	<u>60.8</u>	<u>5.48</u>						
555.pseismic	108	2.61	<u>108</u>	<u>2.61</u>	108	2.61						
556.psp	<u>54.2</u>	<u>15.1</u>	54.3	15.1	54.2	15.1						
557.pcsp	54.9	15.6	54.6	15.7	<u>54.9</u>	<u>15.7</u>						
559.pmniGhost	90.7	4.38	<u>90.6</u>	<u>4.38</u>	90.5	4.39						
560.pilbdc	165	3.95	166	3.94	<u>166</u>	<u>3.95</u>						
563.pswim	<u>42.4</u>	<u>3.75</u>	42.2	3.76	42.5	3.74						
570.pbt	28.6	27.3	<u>28.7</u>	<u>27.2</u>	28.8	27.1						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7742 CPU
ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes

Sysinfo program /home/ACCEL1.2/Docs/sysinfo
\$Rev: 6965 \$ \$Date:: 2015-04-21 #\$ c05a7f14b1b1765e3feldf68447e8a35
running on bannerrh75 Fri Jul 12 15:10:22 2019

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7742 64-Core Processor
 1 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 64
  siblings  : 128
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
                22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
                47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
  cache size : 512 KB
```

```
From /proc/meminfo
MemTotal:      264016932 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux bannerrh75 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018
```

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7742 CPU
ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

(3090901) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 12 15:01

SPEC is set to: /home/ACCEL1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	245G	74G	171G	31%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo CFE101Y 06/22/2019

Memory:

8x Samsung M393A4K40DB2-CWE 32 GB 2 rank 3200 MHz
8x Unknown Unknown

(End of data from sysinfo program)

General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7742 CPU
ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Portability Flags

```

503.postencil: -DSPEC_USE_INNER_SIMD
504.polbm: -DSPEC_USE_INNER_SIMD
514.pomriq: -DSPEC_USE_INNER_SIMD
550.pmd: -DSPEC_USE_INNER_SIMD -80
551.ppalms: -DSPEC_USE_INNER_SIMD
552.pep: -DSPEC_USE_INNER_SIMD
553.pclvrleaf: -DSPEC_USE_INNER_SIMD
554.pcg: -DSPEC_USE_INNER_SIMD
555.pseismic: -DSPEC_USE_INNER_SIMD
556.psp: -DSPEC_USE_INNER_SIMD
557.pcsp: -DSPEC_USE_INNER_SIMD
559.pmniGhost: -DSPEC_USE_INNER_SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER_SIMD
563.pswim: -DSPEC_USE_INNER_SIMD
570.pbt: -DSPEC_USE_INNER_SIMD

```

Base Optimization Flags

C benchmarks:

```

-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2

```

Fortran benchmarks:

```

-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2

```

Benchmarks using both Fortran and C:

```

-O3 -march=core-avx2 -qopenmp -qopenmp-offload=host -no-prec-div
-no-prec-sqrt -ansi-alias -ipo -fp-model fast=2

```

The flags files that were used to format this result can be browsed at

<https://www.spec.org/accel/flags/Intel-icc17.0-linux64.20190807.html>

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190807.html

You can also download the XML flags sources by saving the following links:

<https://www.spec.org/accel/flags/Intel-icc17.0-linux64.20190807.xml>

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190807.xml



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
EPYC 7742 CPU
ThinkSystem SR655

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.12

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.2.
Report generated on Wed Aug 7 19:04:28 2019 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 6 August 2019.